



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C22B 4/00, 4/08	A1	(11) International Publication Number: WO 96/28577 (43) International Publication Date: 19 September 1996 (19.09.96)
<p>(21) International Application Number: PCT/US96/03581</p> <p>(22) International Filing Date: 14 March 1996 (14.03.96)</p> <p>(30) Priority Data: 08/404,395 14 March 1995 (14.03.95) US</p> <p>(71) Applicant: LOCKHEED IDAHO TECHNOLOGIES COMPANY [US/US]; P.O. Box 1625, Idaho Falls, ID 83415 (US).</p> <p>(72) Inventors: DETERING, Brent, A.; 737 Hansen Circle, Idaho Falls, ID 83402 (US). DONALDSON, Alan, D.; 5035 West Canyon Creek Road, Idaho Falls, ID 83402-5425 (US). FINCKE, James, R.; 470 Westridge Drive, Idaho Falls, ID 83402 (US). KONG, Peter, C.; 1836 Coronado Street, Idaho Falls, ID 83404 (US).</p> <p>(74) Agent: GOODSON, W., Gary; Lockheed Idaho Technologies Company, P.O. Box 1625, Idaho Falls, ID 83415 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: FAST QUENCH REACTOR AND METHOD

(57) Abstract

A fast quench reaction includes a reactor chamber having a high temperature heating means such as a plasma torch at its inlet and a restrictive convergent-divergent nozzle at its outlet end. Reactants are injected into the reactor chamber. The resulting heated gaseous stream is then rapidly cooled by passage through the nozzle. This "freezes" the desired end product(s) in the heated equilibrium reaction stage.

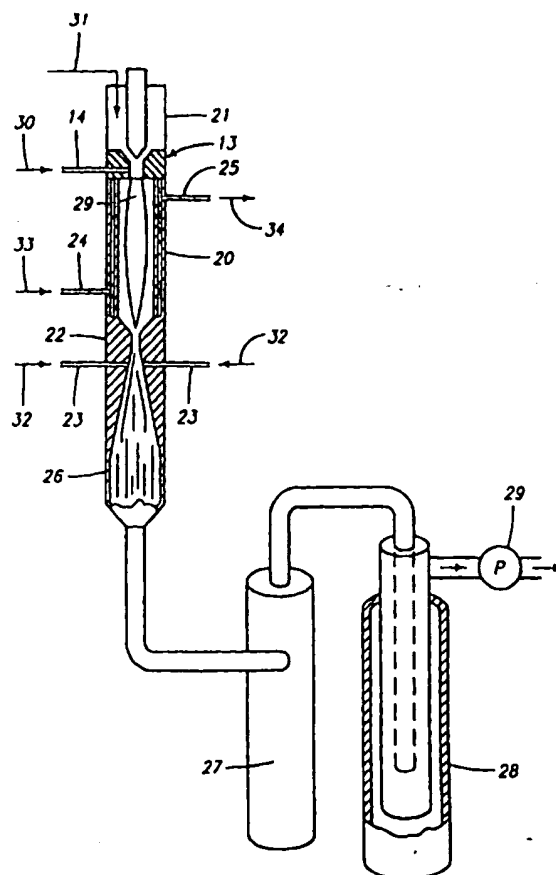

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

5

FAST QUENCH REACTOR AND METHOD

CONTRACTUAL ORIGIN OF THE INVENTION

The United States Government has rights in this invention
10 disclosed under contract number DE-AC07-76ID01570 between the U.S.
Department of Energy and EG&G Idaho, Inc., now contract number
DE-AC07-94ID13223 with Lockheed Idaho Technologies Company.

TECHNICAL FIELD

15 This disclosure pertains to equipment for thermal conversion of
reactants to desired end products, which might be either a gas or
ultrafine solid particles. It also relates specifically to methods for
effectively producing such end products.

20 BACKGROUND OF THE INVENTION

The present reactor and method are intended for high temperature
reactions that require rapid cooling to freeze the reaction products to
prevent back reactions or decompositions to undesirable products. They
use adiabatic and isentropic expansion of gases in a converging-
25 diverging nozzle for rapid quenching. This expansion can result in
cooling rates exceeding 10^{10} K/s, thus preserving reaction products that
are in equilibrium only at high temperatures.

The concepts of this reactor were originally developed in a study
of hydrogen reduction of titanium tetrachloride. When the concept was
30 found to provide the high quench rates required to produce titanium.

the concept was then applied to other processes requiring rapid quenching, including conversion of methane to acetylene.

Titanium's properties of high corrosion resistance and strength, combined with its relatively low density, result in titanium alloys being
5 ideally suited to many high technology applications, particularly in aerospace systems. Applications of titanium in chemical and power plants are also attractive.

Unfortunately, the widespread use of titanium has been severely limited by its high cost. The magnitude of this cost is a direct
10 consequence of the batch nature of the conventional Kroll and Hunter processes for metal production, as well as the high energy consumption rates required by their usage.

The large scale production processes used in the titanium industry have been relatively unchanged for many years. They involve the
15 following essential steps: (1) Chlorination of impure oxide ore, (2) purification of $TiCl_4$ (3) reduction by sodium or magnesium to produce titanium sponge, (4) removal of sponge, and (5) leaching, distillation and vacuum remelting to remove Cl, Na, and Mg impurities. The combined effects of the inherent costs of such processes, the difficulty
20 associated with forging and machining titanium and, in recent years, a shortfall in sponge availability, have contributed to relatively low titanium utilization.

One of the most promising techniques currently undergoing development to circumvent the high cost of titanium alloy parts is
25 powder metallurgy for near net shape fabrication. For instance, it has been estimated that for every kilogram of titanium presently utilized in an aircraft, 8 kilograms of scrap are created. Powder metallurgy can substantially improve this ratio. Although this technology essentially involves the simple steps of powder production followed by compaction
30 into a solid article, considerable development is currently underway to optimize the process such that the final product possesses at least equal properties and lower cost than wrought or cast material.

One potential powder metallurgy route to titanium alloy parts involves direct blending of elemental metal powders before compaction. Presently, titanium sponge fines from the Kroll process are used, but a major drawback is their high residual impurity content (principally chlorides), which results in porosity in the final material. The other powder metallurgy alternative involves direct use of titanium alloy powder subjected to hot isostatic pressing.

Several programs are currently involved in the optimization of such titanium alloy powders. Results are highly promising, but all involve Kroll titanium as a starting material. Use of such existing powders involves a number of expensive purification and alloying steps.

The present disclosure is the result of research to develop a new plasma process for direct and continuous production of high purity titanium powder and/or ingot. The previously-described steps (1) and (2) of the Kroll or Hunter processes are retained in this process, but steps (3), (4), and (5) are replaced by a single, high temperature process. This new process can directly produce high purity titanium from TiCl_4 and eliminates the need for subsequent purification steps.

Depending upon collection conditions encountered in the present process, the resulting titanium product can be either a powder suitable for the elemental blend approach to powder metallurgy or in an ingot or sponge-substitute. Titanium alloy powders and other materials can also be produced in a single step process by such direct plasma production systems.

The formation of titanium under plasma conditions has received intermittent attention in the literature over the last 30 years. Reports have generally been concerned with the hydrogen reduction of titanium tetrachloride or dioxide with some isolated references to sodium or magnesium reduction.

The use of hydrogen for reducing titanium tetrachloride has been studied in an arc furnace. Only partial reduction took place at

2100 K. The same reaction system has been more extensively studied in a plasma flame and patented for the production of titanium subchloride (German Patent 1,142,159, January 10, 1963) and titanium metal (Japanese Patents 6854, May 23, 1963; 7408, October 15, 1955; 5 U.S. Patent 3,123,464, March 3, 1964).

Although early thermodynamic calculations indicated that the reduction of titanium tetrachloride to metallic titanium by hydrogen could start at 2500 K, the system is not a simple one. Calculations show that the formation of titanium subchloride would be 10 thermodynamically more favorable in that temperature region.

U.S. Patent No. 3,123,464, March 3, 1964, claims that reduction of titanium tetrachloride to liquid titanium can be successfully carried out by heating the reactants (TiCl_4 and H_2) at least to, and preferably in excess of, the boiling point of titanium (3535 K). At such a high 15 temperature, it was claimed that while titanium tetrachloride vapor is effectively reduced by atomic hydrogen, the tendency of H_2 to dissolve in or react with Ti is insignificant, the HCl formed is only about 10% dissociated, and the formation of titanium subchlorides could be much less favorable. The titanium vapor product is then either condensed to 20 liquid in a water-cooled steel condenser at about 3000 K, from which it overflows into a mold, or is flash-cooled by hydrogen to powder, which is collected in a bin. Since the liquid titanium was condensed from gas with only gaseous by-products or impurities, its purity, except for hydrogen, was expected to be high.

25 Japanese Patent 7408, October 15, 1955, described reaction conditions as follows: a mixture of TiCl_4 gas and H_2 (50% in excess) is led through a 5 mm inside diameter nozzle of a tungsten electrode at a rate of $4 \times 10^{-3} \text{ m}^3/\text{min}$ and an electric discharge (3720 V and 533 mA) made to another electrode at a distance of 15 mm. The 30 resulting powdery crystals are heated in vacuo to produce 99.4% pure titanium.

In neither of the above patents is the energy consumption clearly mentioned. Attempts to develop the hydrogen reduction process on an industrial scale were made using a skull-melting furnace, but the effort was discontinued. More recently, a claim was made that a small
5 quantity of titanium had been produced in a hydrogen plasma, but this was later retracted when the product was truly identified as titanium carbide.

In summary, the history of attempts to treat TiCl_4 in hydrogen plasmas appears to indicate that only partial reduction, i.e., to a
10 mixture of titanium and its subchlorides, is possible unless very high temperatures (>4000 K) are reached. Prior researchers have concluded that extremely rapid, preferential condensation of vapor phase titanium would be required in order to overcome the unfavorable thermodynamics of the system.

15 A second exemplary application of the present equipment and method pertains to production of acetylene from methane.

Natural gas (where methane is the main hydrocarbon) is a low value and underutilized energy resource in the U.S. Huge reserves of natural gas are known to exist in remote areas of the continental U.S..
20 but this energy resource cannot be transported economically and safely from those regions. Conversion of natural gas to higher value hydrocarbons has been researched for decades with limited success in today's economy.

Recently, there have been efforts to evaluate technologies for the
25 conversion of natural gas (which is being flared) to acetylene as a feed stock for commodity chemicals. The ready availability of large natural gas reserves associated with oil fields and cheap labor might make the natural gas to acetylene route for producing commodity chemicals particularly attractive in this part of the world.

30 Acetylene can be used as a feed stock for plastic manufacture or for conversion by demonstrated catalyzed reactions to liquid hydrocarbon fuels. The versatility of C_2H_2 as a starting raw material

is well known and recognized. Current feed stocks for plastics are derived from petrochemical based raw materials. Supplies from domestic and foreign oil reserves to produce these petrochemical based raw materials are declining, which puts pressure on the search for alternatives to the petrochemical based feed stock. Therefore, the interest in acetylene based feed stock has currently been rejuvenated.

Thermal conversion of methane to liquid hydrocarbons involves indirect or direct processes. The conventional methanol-to-gasoline (MTG) and the Fischer-Tropsch (FT) processes are two prime examples of such indirect conversion processes which involve reforming methane to synthesis gas before converting to the final products. These costly endothermic processes are operated at high temperatures and high pressures.

The search for direct catalytic conversion of methane to light olefins (e.g. C_2H_4) and then to liquid hydrocarbons has become a recent focal point of natural gas conversion technology. Oxidative coupling, oxyhydrochlorination, and partial oxidation are examples of direct conversion methods. These technologies require operation under elevated pressures, moderate temperatures, and the use of catalysts. Development of special catalysts for direct natural gas conversion process is the biggest challenge for the advancement of these technologies. The conversion yields of such processes are low, implementing them is costly in comparison to indirect processes, and the technologies have not been proven.

Light olefins can be formed by very high temperature ($>1800^\circ\text{C}$) abstraction of hydrogen from methane, followed by coupling of hydrocarbon radicals. High temperature conversion of methane to acetylene by the reaction $2CH_4 \rightarrow C_2H_2 + 3H_2$ is an example. Such processes have existed for a long time.

Methane to acetylene conversion processes currently use cold liquid hydrocarbon quenchants to prevent back reactions. Perhaps the

best known of these is the Huels process which has been in commercial use in Germany for many years. The electric arc reactor of Huels transfers electrical energy by 'direct' contact between the high-temperature arc (15000-20000 K) and the methane feed stock. The product gas is quenched with water and liquefied propane to prevent back reactions. Single pass yields of acetylene are less than 40% for the Huels process. Overall C_2H_2 yields are increased to 58% by recycling all of the hydrocarbons except acetylene and ethylene.

Although in commercial use, the Huels process is only marginally economical because of the relatively low single pass efficiencies and the need to separate product gases from quench gases. Subsidies by the German Government have helped to keep this process in production.

Westinghouse has employed a hydrogen plasma reactor for the cracking of natural gas to produce acetylene. In the plasma reactor, hydrogen is fed into the arc zone and heated to a plasma state. The exiting stream of hot H_2 plasma at temperatures above 5000 K is mixed rapidly with the natural gas below the arc zone, and the electrical energy is indirectly transferred to the feed stock. The hot product gas is quenched with liquefied propane and water, as in the Huel process, to prevent back reactions. However, as with the Huels process, separation of the product gas from quench gas is needed. Recycling all of the hydrocarbons except acetylene and ethylene has reportedly increased the overall yield to 67%. The H_2 plasma process for natural gas conversion has been extensively tested on a bench scale. but further development and demonstration on a pilot scale is required.

The Scientific and Industrial Research Foundation (SINTEF) of Norway has developed a reactor consisting of concentric, resistance-heated graphite tubes. Reaction cracking of the methane occurs in the narrow annular space between the tubes where the temperature is 1900 to 2100 K. In operation, carbon formation in the annulus led to significant operational problems. Again, liquefied quenchant is used to

quench the reaction products and prevent back reactions. As with the previous two acetylene production processes described above, separation of the product gas from quench gas is needed. The overall multiple-pass acetylene yield from the resistance-heated reactor is about 80% and
5 the process has been tested to pilot plant levels.

Like the Huels reactor, the present fast quench reactor can use an electric arc plasma process to crack the methane, but it requires no quenchant to prevent back reactions. In this manner it eliminates any need for extensive separation.

10

SUMMARY OF THE INVENTION

This invention relates to a reactor and method for producing desired end products by injecting reactants into the inlet end of a reactor chamber; rapidly heating the reactants to produce a hot reactant
15 stream which flows toward the outlet end of the reactant chamber, the reactor chamber having a predetermined length sufficient to effect heating of the reactant stream to a selected equilibrium temperature at which the desired end product is available within the reactant stream as a thermodynamically stable reaction product at a location adjacent
20 to the outlet end of the reaction chamber; passing the gaseous stream through a restrictive convergent-divergent nozzle arranged coaxially within the remaining end of the reactor chamber to rapidly cool the gaseous stream by converting thermal energy to kinetic energy as a result of adiabatic and isentropic expansion as it flows axially through
25 the nozzle and minimizing back reactions, thereby retaining the desired end product within the flowing gaseous stream; and subsequently cooling and slowing the velocity of the desired end product and remaining gaseous stream exiting from the nozzle. Preferably the rapid heating step is accomplished by introducing a stream of plasma arc gas to a
30 plasma torch at the inlet end of the reactor chamber to produce a plasma within the reactor chamber which extends toward its outlet end.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are described below with reference to the following drawings.

Fig. 1 is a schematic cross-sectional view of a reactor system;

5 Fig. 2 is an enlarged cross-sectional view of the reactor chamber and converging-diverging nozzle;

Fig. 3 is a plot of temperatures, pressures, specific volumes and nozzle throat areas as a function of gas velocity in the reactor apparatus;

10 Fig. 4 is a graph plotting equilibrium concentrations in a titanium tetrachloride and hydrogen system as a function of temperature;

Fig. 5 is a graph plotting equilibrium concentrations in a titanium tetrachloride and hydrogen system with added argon gas as a function of temperature;

15 Fig. 6 is a graph plotting equilibrium concentrations in a methane decomposition system with solid carbon precipitation; and

Fig. 7 is a graph plotting equilibrium concentrations in a methane decomposition system with solid carbon precipitation prevented.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 The fast quench reactor and method of operation described in this disclosure take advantage of the high temperatures (5,000 to 20,000°C) available in a high temperature heating means such as a thermal plasma to produce materials that are thermodynamically stable at these high temperatures. These materials include metals, alloys, 25 intermetallics, composites, gases and ceramics.

A converging-diverging (De Laval) nozzle located downstream from the plasma and reactant addition inlet(s) produces a rapid drop in kinetic temperature in a flowing gas stream. This effectively "freezes" or stops all chemical reactions. It permits efficient collection of 30 desired end products as the gases are rapidly cooled without achieving an equilibrium condition. Resulting end products which have been produced in the plasma at high temperature but are thermodynamically

unstable or unavailable at lower temperatures can then be collected due to resulting phase changes (gas to solid) or stabilization by cooling to a lower equilibrium state (gas to gas).

5 The fast quench reactor and method of this invention shall be described and illustrated forthwith in terms of a rapid heating means comprising a plasma torch and a stream of plasma arc gas. However, it will be recognized that the rapid heating means can also include other rapid heating means such as lasers, and flames produced by oxidation of a suitable fuel, e.g. an oxygen/hydrogen flame.

10 A schematic diagram of an ultra fast quenching apparatus is shown in Fig. 1. An enclosed axial reactor chamber 20 includes an inlet at one end (shown to the left) and an outlet at its remaining end (shown to the right).

A plasma torch 21 is positioned adjacent to the reactor chamber. 15 Torch 21 is used to thermally decompose an incoming gaseous stream within a resulting plasma 29 as the gaseous stream is delivered through the inlet of the reactor chamber 20.

A plasma is a high temperature luminous gas which is at least partially (1 to 100%) ionized. A plasma is made up of gas atoms, 20 gas ions, and electrons. In the bulk phase a plasma is electrically neutral. A thermal plasma can be created by passing a gas through an electric arc. The electric arc will rapidly heat the gas by resistive and radiative heating to very high temperatures within microseconds of passing through the arc. The plasma is typically luminous at 25 temperatures above 9000 K.

A plasma can be produced with any gas in this manner. This gives excellent control over chemical reactions in the plasma as the gas might be neutral (argon, helium, neon), reductive (hydrogen, methane, ammonia, carbon monoxide) or oxidative (oxygen, nitrogen, carbon 30 dioxide). Oxygen or oxygen/argon gas mixtures are used to produce metal oxide ceramics and composites. Other nitride, boride, and carbide ceramic materials require gases such as nitrogen ammonia.

hydrogen, methane, or carbon monoxide to achieve the correct chemical environment for synthesis of these materials.

The details of plasma generating torches are well known and need not be further detailed within this disclosure to make the present invention understandable to those skilled in this field.

An incoming stream of plasma gas is denoted by arrow 31. The plasma gas can also be a reactant or can be inert. A gaseous stream of one or more reactants (arrow 30) is normally injected separately into the plasma 29, which is directed toward the downstream outlet of the reactor chamber 20. The gaseous stream moving axially through the reactor chamber 20 includes the reactants injected into the plasma arc or within a carrier gas.

Reactant materials are usually injected downstream of the location where the arc attaches to the annular anode of the plasma generator or torch. Materials which can be injected into the arc region include natural gas, such as is used in the Huels process for the production of ethylene and acetylene from natural gas.

Gases and liquids are the preferred forms of injected reactants. Solids may be injected, but usually vaporize too slowly for chemical reactions to occur in the rapidly flowing plasma gas before the gas cools. If solids are used as reactants, they will usually be heated to a gaseous or liquid state before injection into the plasma.

A convergent-divergent nozzle 22 is coaxially positioned within the outlet of the reactor chamber 20. The converging or upstream section of the nozzle restricts gas passage and controls the residence time of the hot gaseous stream within the reactor chamber 20, allowing its contents to reach thermodynamic equilibrium. The contraction that occurs in the cross sectional size of the gaseous stream as it passes through the converging portions of nozzle 22 change the motion of the gas molecules from random directions, including rotational and vibrational motions, to straight line motion parallel to the reactor chamber axis. The dimensions of the reactor chamber 20 and the

incoming gaseous flow rates are selected to achieve sonic velocity within the restricted nozzle throat.

As the confined stream of gas enters the diverging or downstream portions of the nozzle 22, it is subjected to an ultra fast
5 decrease in pressure as a result of a gradual increase in volume along the conical walls of the nozzle exit. The resulting pressure change instantaneously lowers the temperature of the gaseous stream to a new equilibrium condition.

An additional reactant, such as hydrogen at ambient temperatures,
10 can be tangentially injected into the diverging section of nozzle 22 (arrow 32) to complete the reactions or prevent back reactions as the gases are cooled. Supply inlets for the additional reactant gas are shown in Fig. 1 at 23.

Numerals 24 and 25 designate a coolant inlet and outlet for the
15 double-walled structure of the reactor chamber 20. Coolant flow is indicated by arrows 33 and 34. The walls of nozzle 22 and a coaxial cool down chamber 26 downstream from it should also be physically cooled to minimize reactions along their inner wall surfaces.

Reaction particles are collectable within a cyclone separator shown
20 generally at 27. A downstream liquid trap 28, such as a liquid nitrogen trap, can be used to condense and collect reactor products such as hydrogen chloride and ultra-fine powders within the gaseous stream prior to the gaseous stream entering a vacuum pump 29.

Fig. 2 further illustrates details of the converging-diverging nozzle
25 structure. The same reference numerals are used in Fig. 2 as in Fig. 1. By proper selection of nozzle dimensions, the reactor chamber 20 can be operated at atmospheric pressure or in a pressurized condition, while the chamber 26 downstream from nozzle 22 is maintained at a vacuum pressure by operation of pump 29. The
30 sudden pressure change that occurs as the gaseous stream traverses nozzle 22 brings the gaseous stream to a lower equilibrium condition

instantly and prevents unwanted back reactions that would occur under more drawn out cooling conditions.

Typical residence times for materials within the free flowing plasma are on the order of milliseconds. To maximize mixing with
5 the plasma gas the reactants (liquid or gas) are injected under pressure (10 to 100 atmospheres) through a small orifice to achieve sufficient velocity to penetrate and mix with the plasma. It is preferable to use gaseous or vaporized reactants whenever practical, since this eliminates need for a phase change within the plasma and improves the
10 kinetics of the reactor. In addition, the injected stream of reactants is injected normal (90° angle) to the flow of the plasma gases. In some cases positive or negative deviations from this 90° angle by as much as 30° may be optimum.

The high temperature of the plasma rapidly vaporizes the injected
15 liquid materials and breaks apart gaseous molecular species to their atomic constituents. A variety of metals (titanium, vanadium, antimony, silicon, aluminum, uranium, tungsten), metal alloys (titanium/vanadium, titanium/aluminum, titanium/aluminum/vanadium), intermetallics (nickel aluminide, titanium aluminide), and ceramics (metal oxides, nitrides,
20 borides, and carbides) can be synthesized by injecting metal halides (chlorides, bromides, iodides, and fluorides) in liquid or gaseous form into a plasma of the appropriate gas downstream from the anode arc attachment point and within the torch exit or along the length of the reactor chamber. Titanium dioxide and antimony oxide are especially
25 preferred ultrafine powders produced according to this invention. Solid metal halide materials are preferably vaporized and injected into the plasma as a liquid or gas to improve reaction kinetics.

The reaction chamber 20 is the location in which the preferred chemical reactions occur. It begins downstream from the plasma arc
30 inlet and terminates at the nozzle throat. It includes the reactor areas in which reactant injection/mixing and product formation occurs, as well as the converging section of the quench nozzle.

Temperature requirements within the reactor chamber and its dimensional geometry are specific to the temperature required to achieve an equilibrium state with an enriched quantity of each desired end product.

5 There is a substantial difference in temperature gradients and gaseous flow patterns along the length of the reaction chamber 20. At the plasma arc inlet, flow is turbulent and there is a high temperature gradient; from temperatures of about 20,000 K at the axis of the chamber to about 375 K at the chamber walls. At the nozzle throat,
10 the gaseous flow is laminar and there is a very low temperature gradient across its restricted open area.

 Since the reaction chamber is an area of intense heat and chemical activity it is necessary to construct the reactor chamber of materials that are compatible with the temperature and chemical activity
15 to minimize chemical corrosion from the reactants, and to minimize melting degradation and ablation from the resulting intense plasma radiation. The reactor chamber is usually constructed of water cooled stainless steel, nickel, titanium, or other suitable materials. The reactor chamber can also be constructed of ceramic materials to withstand the
20 vigorous chemical and thermal environment.

 The reaction chamber walls are internally heated by a combination of radiation, convection and conduction. Cooling of the reaction chamber walls prevents unwanted melting and/or corrosion at their surfaces. The system used to control such cooling should
25 maintain the walls at as high a temperature as can be permitted by the selected wall material, which must be inert to the reactants within the reactor chamber at the expected wall temperatures. This is true also with regard to the nozzle walls, which are subjected to heat only by convection and conduction.

30 The dimensions of the reactor chamber are chosen to minimize recirculation of the plasma and reactant gases and to maintain sufficient

heat (enthalpy) going into the nozzle throat to prevent degradation (undesirable back or side reaction chemistry).

The length of the reactor chamber must be determined experimentally by first using an elongated tube within which the user
5 can locate the target reaction threshold temperature. The reactor chamber can then be designed long enough so that reactants have sufficient residence time at the high reaction temperature to reach an equilibrium state and complete the formation of the desired end products. Such reaction temperatures can range from a minimum of
10 about 1700°C to about 4000°C.

The inside diameter of the reactor chamber 20 is determined by the fluid properties of the plasma and moving gaseous stream. It must be sufficiently great to permit necessary gaseous flow, but not so large that undesirable recirculating eddies or stagnant zones are formed along
15 the walls of the chamber. Such detrimental flow patterns will cool the gases prematurely and precipitate unwanted products, such as subchlorides or carbon. As a general rule, the inside diameter of the reactor chamber 20 should be in the range of 100 to 150 % of the plasma diameter at the inlet end of the reactor chamber.

20 The purpose of the converging section of the nozzle is to compress the hot gases rapidly into a restrictive nozzle throat with a minimum of heat loss to the walls while maintaining laminar flow and a minimum of turbulence. This requires a high aspect ratio change in diameter that maintains smooth transitions to a first steep angle ($>45^\circ$)
25 and then to lesser angles ($<45^\circ$) leading into the nozzle throat.

The purpose of the nozzle throat is to compress the gases and achieve sonic velocities in the flowing hot gaseous stream. This converts the random energy content of the hot gases to translational energy (velocity) in the axial direction of gas flow. This effectively
30 lowers the kinetic temperature of the gases and almost instantaneously limits further chemical reactions. The velocities achieved in the nozzle throat and in the downstream diverging section of the nozzle are

controlled by the pressure differential between the reactor chamber and the section downstream of the diverging section of the nozzle. Negative pressure can be applied downstream or positive pressure applied upstream for this purpose.

- 5 The purpose of the diverging section of the nozzle is to smoothly accelerate and expand gases exiting the nozzle from sonic to supersonic velocities, which further lowers the kinetic temperature of the gases.

- 10 The term "smooth acceleration" in practice requires use of a small diverging angle of less than 35 degrees to expand the gases without suffering deleterious effects of separation from the converging wall and inducing turbulence. Separation of the expanding gases from the diverging wall causes recirculation of some portion of the gases
15 recirculation in turn results in local reheating of the expanding gases and undesirable degradation reactions, producing lower yields of desired end products.

PHYSICS OF THE NOZZLE

- 20 The super fast quench phenomena observed in this reactor is achieved by rapidly converting thermal energy in the gases to kinetic energy via a modified adiabatic and isentropic expansion through a converging-diverging nozzle. In the process, the gas temperature and pressure drop extremely fast and the gas reaches supersonic velocity. It is important to first raise the temperature of the reactants in the
25 reactor chamber to a level at which the desired end product is more stable than other reaction products in equilibrium with it. This is normally a consequence of the fact that the free energy of the desired end product will decrease at the selected elevated temperatures in comparison to the remaining reaction products. However, this window
30 of opportunity is very short-lived ($< 10^{-3}$ sec) in a high temperature reactor. To stabilize maximum conversion of the reaction product, it is necessary to rapidly cool the emerging gas below a selected cooling

temperature to force it to a lower equilibrium state and thereby prevent decomposition of the end product.

To understand the quench phenomenon in this reactor, it is necessary to investigate the changes in the temperature, pressure, and velocity of the gases as a function of changes in reactor geometry.

The reactor nozzle 22 (Fig. 2) can be divided into three sections; the convergent reaction chamber 10, the nozzle throat 11, and the divergent quench chamber 12. The entrance angle to the throat area, the cross-sectional area of the throat, and the diverging angle after the throat all exert influence on the temperature, pressure, and velocity profiles of the plasma gas.

In the converging-diverging nozzle, the gas is flowing from a higher pressure P_0 to a lower pressure P_1 . During passage of the gas through the nozzle, there will be a rapid transformation of thermal energy to kinetic energy. This kinetic energy will give rise to a high gas velocity after discharging from the nozzle. The gas enters the converging section at a low velocity and will emerge at the diverging section with a higher velocity.

The velocity of the gas in the throat of the nozzle, assuming adiabatic expansion, will achieve sonic values. When the gas accelerates through the nozzle throat, the temperature of the gas will, simultaneously drop rapidly. As a result of high velocity cooling, the initial gas temperature (T_0) will drop to a lower temperature, T_1 , upon exiting from the nozzle. This rapid temperature quenching through a nozzle freezes the high temperature equilibrium products of a high temperature gas phase reaction. The pressure and temperature drop resulting from adiabatic expansion in a converging-diverging nozzle is described in the following equation:

$$\left(\frac{P_0}{P_1}\right)^{\frac{\gamma-1}{\gamma}} = \frac{T_0}{T_1}$$

P_0 , P_1 , T_0 are initial and final pressures and temperatures of the gas, respectively. γ is the ratio of C_p/C_v where C_p and C_v are the heat capacities at constant pressure and volume, respectively. At 2500 K, γ is 1.66 for Ar, 1.30 for H_2 , and 1.11 for C_2H_2 . This equation can be used to estimate the temperature drop across the nozzle throat if the initial and final pressures of the gases are known or vice versa. The mass flow rate, \dot{m} , is related to the cross-sectional area (A^*) of the nozzle throat, the velocity (V) and the specific volume (Ω) of the gas at the throat. The specific volume (Ω) is the inverse of gas density at the cross section.

$$\dot{m} = \left(\frac{V}{\Omega}\right) \times A^*$$

After substituting T_0 , P_0 , γ , M (molecular weight), and R (the gas constant) for V/Ω , the equation takes the form:

$$\dot{m} = \left(\frac{P_0 M}{RT_0}\right) \left(\frac{\gamma RT_0}{M}\right)^{1/2} \times \left(\frac{2}{\gamma+1}\right)^{\frac{(\gamma+1)}{2(\gamma-1)}} \times A^*$$

This equation has been used to guide the design of the nozzle diameters used in the reactors built to date. Despite the assumption for constant γ (which is valid for an argon plasma), the equation has been quite accurate in predictions of mass flow as a function of temperature, pressure, molecular weight, and nozzle diameter compared to experimental results.

The velocity of the expanding gas in mach number (Ma) is related to temperature (T), pressure (P), density ($\rho=\Omega^{-1}$), and nozzle area (A) by the following equations:

$$\frac{T_0}{T} = 1 + \frac{\gamma-1}{2} (Ma)^2$$

$$\frac{P_0}{P} = \left[1 + \frac{\gamma-1}{2} (Ma)^2 \right]^{\gamma/(\gamma-1)}$$

$$\frac{\rho_0}{\rho} = \left[1 + \frac{\gamma-1}{2} (Ma)^2 \right]^{\gamma/(\gamma-1)}$$

$$\frac{A}{A^*} = \frac{1}{Ma} \left\{ \frac{2}{\gamma+1} \left[1 + \frac{\gamma-1}{2} (Ma)^2 \right] \right\}^{(\gamma+1)/(2(\gamma-1))}$$

In the last equation above, A^* is the cross-sectional area at the throat of the nozzle, and A is the cross-sectional area of the converging-diverging section. Substituting T_0/T into the equation, it becomes

$$\frac{A}{A^*} = \frac{1}{Ma} \left\{ \frac{2}{\gamma+1} \times \frac{T_0}{T} \right\}^{(\gamma+1)/(2(\gamma-1))}$$

Figure 3 is a plot of T/T_0 , P/P_0 , Ω_0/Ω , and A/A^* through a nozzle throat as a function of the gas velocity (in Ma) for $\gamma = 1.3$ (H_2). It clearly demonstrates that both gas temperature and pressure quench rapidly upon exiting from the nozzle. The resulting high gas velocity lends itself to the application of a gas-turbine to recuperate the energy as electricity to supplement the process.

In a test case (using a 95% Ar and 5% H_2 plasma) if $A/A^*=4$, $Ma=2$, and $\gamma=1.66$ the final temperature drops almost by a factor of 4. This type of temperature drop is easily attainable through the quench nozzle. If the final temperature in the quench chamber for a

reaction is 500 K, then the initial temperature before the quench nozzle would be around 2000 K.

EXAMPLE 1 - TITANIUM

The preferred method for producing titanium from titanium
5 tetrachloride (TiCl_4) involves directing titanium tetrachloride vapor and
a hydrogen into a hot plasma torch operated at 12 kW with a mixture
of argon and hydrogen as the plasma gas (95% Argon: 5% Hydrogen,
by volume) to decompose it to titanium and chlorine, followed by rapid
expansion of the resulting hot gases and cooling with additional
10 hydrogen to retain the titanium in an elemental solid metal state.

The diameter and length (6.0 mm x 700.0 mm) of the reaction
chamber was chosen to obtain maximum mixing while maintaining a
minimum of 4000 K temperature at the entrance of the nozzle throat.
The reaction chamber, converging/diverging nozzle were constructed from
15 nickel 200 alloy to reduce corrosion. Standard equations were used to
calculate the dimensions of the bell-shaped converging nozzle, nozzle
throat diameter diverging angle, and diverging nozzle exit diameter.

Reactants: Titanium tetrachloride liquid and hydrogen gas

Plasma Torch: -10 kW laboratory plasma torch

20 -30 Volts, 400 Amps

-Cathode: thoriated tungsten in water cooled
copper

-Anode: Water-Cooled Copper Cylinder
6.0 mm diameter x 20.0 mm in length

25 Plasma Gas: 95% Argon, 5% Hydrogen. Average total gas
flow was maintained at 23.6 liters/min.

Reactant Injection: Gaseous (200°C) Titanium tetrachloride at the point
where the plasma plume exits the plasma torch.
The hot titanium tetrachloride injection tubes.
30 reaction chamber and converging/diverging nozzle
section were constructed from nickel 200 alloy to
minimize corrosion.

- Injection Rate: Vaporized Titanium tetrachloride was injected at the rate of 10.0 to 15.0 milliliters/hour. This resulted in a titanium metal powder production rate of 5 grams per hour.
- 5 Reaction Chamber: Water-cooled Nickel 200 cylinder 6.0 mm x 20.0 mm
- Converging Nozzle: Bell shaped with 2.0 mm radii
- Nozzle throat: 2.0 mm x 1.0 mm in length, determined from standard equations.
- 10 Diverging Nozzle: Conical shaped with 14° included angle expanding out to a 12.0 mm diameter.
- Cool down section: Water-cooled stainless steel, 12.0 mm diameter x 600.0 mm
- 15 Cyclone collectors: Water-cooled stainless steel, 12.0 mm inlet and outlet diameter, 50.0 mm inside diameter body, designed to maintain high entrance and exit velocity
- Off-Gas Cleanup: After product collection the process gas was passed through a liquid nitrogen cold trap and HEPA filter to remove HCl gas and residual titanium particles before the gas enter the mechanical vacuum pump.
- 20 Vacuum System: A mechanical vacuum pump was used to maintain pressure downstream from the nozzle throat at 5.0 to 10.0 Torr (mm Hg)

25 Figs. 1 and 2 of the drawings pertain to an apparatus tested for recovering elemental metals from metal-containing compounds. In the described preferred embodiment, the elemental metal is titanium and the metal-containing compound is titanium tetrachloride (TiCl₄). However, the illustrated apparatus is suitable for use with other metals and

30 compounds where plasma processing of the compound requires ultra fast quenching to prevent back reactions.

The plasma torch 21 located at the reactor chamber inlet thermally decomposes an incoming gaseous stream comprised of a metal-containing compound plus one or more reactants as the resulting gaseous stream moves axially through the reactor chamber 20 in conjunction with a carrier gas. The resulting hot gaseous stream is then directed through the coaxial convergent-divergent nozzle 22. The convergent portion 10 of the nozzle 22 controls the residence time of the hot gaseous stream within the reactor chamber 20, thereby allowing its contents to reach thermodynamic equilibrium. It also streamlines the flow of hot gases, converting their motion from random movement to straight line movement along the central nozzle axis. The divergent portion 12 of the nozzle 22 subjects the stream to an ultra fast decrease in pressure. Quenching streams of gas, normally at ambient temperature, are introduced into the hot gaseous stream through inlets 23 as it passes through the nozzle. This rapidly cools the contents of the hot gaseous stream at a rate that condenses the elemental metal and inhibits formation of equilibrium products.

The plasma reduction is based on a quasi equilibrium-temperature quench sequence in which the initiation of nucleation is controlled by passage of a heated gaseous stream through a converging-diverging nozzle geometry. Results from present system tests have shown the feasibility of the process. The powder product is extremely fine (- 20 nm).

Conditions necessary for complete dissociation of TiCl_4 can be predicted using free energy minimization techniques which assume thermodynamic equilibrium. Figure 4 shows the species as a function of temperature for a $\text{TiCl}_4 + 2\text{H}_2$ system at 1 atm. When argon is taken into account (to 96%) there is basically no change in the relative species distribution. As seen in Fig. 4, as TiCl_4 is heated the chlorides are stripped off, until at temperatures above 5000 K there is a substantial amount of only Ti, Ti^+ , Cl, Cl^+ , TiCl , HCl and H_2 . However as the amount of hydrogen, relative to that required for a

stoichiometric HCl product, is increased to 32:1 this diagram shifts to lower temperatures (Fig. 5). In all cases the requirement is for good mixing and a sufficient residence time of the reactants in the plasma.

Homogeneous (gas phase) nucleation of particles from the vapor in a plasma system has been studied theoretically and published discussion of such issues are readily available. The initiation of homogeneous nucleation depends on the formation of small atom clusters which arise due to collisions. Normally, the cluster evaporation rate is much greater than the condensation rate and the particle clusters do not grow. However at sufficiently low temperatures the vapor becomes supersaturated and the condensation rate drastically increases. This results in a nucleation burst after which time the particles increase in size slowly.

In a rapidly cooling plasma system one can think of the gas in equilibrium at temperature T_0 and pressure P_0 being suddenly quenched in temperature and pressure. For Ti-Cl-H at 6000 K, published results estimate a chemical equilibration time of less than 10 nsec. At this temperature the reactants should be well equilibrated. As the plasma cools this characteristic time increases until at a particular T and P , the cooling rate becomes greater than the equilibrium rate and the composition of the plasma is "frozen." On further temperature decrease, the vapor pressure of one component subsystem becomes greater than the saturation vapor pressure and nucleation occurs. When this subsystem is charged, condensation is enhanced for that species.

Taking into consideration the free energy equilibrium condition shown in Figure 4, in order to avoid stable $TiCl_x$, $x = 2, 3, 4$ compounds, the gas must be frozen at temperatures above 5000 K. With an overabundance of hydrogen this temperature can be reduced to about 3000 K (Fig. 5). Freezing the mixture at even lower temperatures will result in a substantial amount of $TiCl_x$ vapors. However, if the vapor pressure of these subchlorides never gets above saturation, they will not condense. Hence, it is possible to extend the

equilibrium reactor chamber temperature down to lower temperatures. This will result in some loss of Ti in the form of gas subchlorides. It is clear from this that a higher temperature quench will result in a better yield of the desired end product.

5 The saturation vapor pressures of Ti-Cl compounds at all temperatures are greater than that of Ti, and it is possible to selectively condense Ti metal. The presence of hydrogen serves to isolate the titanium from the chlorine atoms by forming both HCl and TiH in the gas phase.

10 Experimental conditions for selective condensation of Ti from a Ti-Cl-H-Ar plasma depend on specific values of rate coefficients and upon the initial temperature and pressure T_0 and P_0 at which the plasma is frozen. The product is also dependent on the cooling rate of the plasma and upon the geometry of the reactor. Of course not
15 all reaction pathways become "frozen" at the same temperature during quench.

 The converging-diverging nozzle configuration used in supersonic flow applications offers possibilities to control both the temperature quench rate and the concentration at which the plasma becomes "frozen"
20 during the expansion. The converging-diverging DeLaval nozzle and the associated Prandtl-Meyer expansion process are discussed in standard texts on compressible fluid flow. In such expansion nozzles the hot plasma gas undergoes an approximate isentropic expansion and the energy in the gas (its enthalpy) is converted to unidirectional velocity
25 in the diverging nozzle. When the exit pressure is sufficiently low, it is possible to reach supersonic speeds. Non-adiabatic expansion processes which are attained in practice aid in the resultant temperature search.

 A number of preliminary experiments with $TiCl_4$ gas injected into
30 an argon or argon-hydrogen plasma have been completed. The dimensions and geometry of the reactors have been varied. Provisions were made for gas quenching at the throat exit. The production of

substantial amounts of fine (<100 nm) metal powders over a wide range of parameters has been successfully accomplished.

Nitrogen gas impurities in such systems result in the formation of solid NH_4Cl powder which can be separated from the (black) powder produced by heat treating at about 400°C in flowing hydrogen. Oxygen impurities, however, result in TiO_2 production. In virtually all runs to date, the only chlorine in the final product is that tied up as ammonium chloride and the product can be upgraded to be chlorine free. Presently HCl is condensed in a cold trap placed just before the downstream pumping system.

The powder produced is black. The as-produced product has been analyzed by SEM and characterized by Energy Dispersion Spectra (EDS). A SEM scan of the powder showed finer structure. A typical x-ray diffraction (XRD) scan is featureless (flat). It shows no crystal structure nor any short range ordering. An electron diffraction pattern confirms this result. The maximum yield of titanium metal to date with the present system is 5 gm/hr. It is 100% free of chlorine.

The addition of hydrogen to the plasma system ties up the chlorine atoms and produces TiH powder. The presence of hydrogen allows the powder to be relatively easily handled and may be crucial to scaled-up metal production facilities. When the powder is left in air for a few weeks, it turns noticeably white, indicating oxidation of the metal. In-situ laser induced fluorescence of TiO has been observed in the expansion chamber with a small amount (~ 100 ppm) of oxygen in the Ar carrier gas. This fluorescence can serve as a diagnostic to investigate temperatures in the expansion zone.

The described apparatus and method have been successfully tested with respect to production of powdered titanium metal. Product yields have exceeded 80% of theoretical yields. Analysis has confirmed that the produced powder is titanium metal and consisted of partly agglomerated submicron particles. Submicron powder production has been consistent from one run to the next. Laboratory experiments have

successfully produced up to 5 grams of titanium per hour, which is to be compared to CVD deposition rates in the order of tenths of a gram of titanium per hour.

EXAMPLE 2 - TITANINUM DIOXIDE

5 TiO₂ production in the 50 nm range can also be carried out in the existing facilities. For this purpose, TiCl₄ is injected into an argon plasma and mixed with O₂ just before the quench zone. Most of the TiO₂ produced today is used in the paint industry and a 50 nm size (rather than the present 200 nm) is advantageous. There is also some
10 interest in fine TiO₂ as a ceramic. Preliminary results at low TiCl₄ (~1 gm/hr) flow are encouraging.

The resulting titanium dioxide has a rutile structure, which has superior properties in blocking ultraviolet light. Titanium dioxide particles can be produced with average diameters of 10 nanometers or
15 less in the narrow size ranges as defined, which can find use as a sun blocking agent for protecting human skin against harmful effects of sunlight.

The process meets all requirements for titanium production, in that it provides downstream reduction in a kinetically controlled reactor
20 to remove halide from back reactions, leaving free metal in the exiting gaseous stream. Unwanted atomic reactions cannot occur in the reactor due to the short residence time of the gaseous stream.

EXAMPLE 3 - ACETYLENE

Methane conversion to acetylene in a high temperature reactor
25 follows the theoretical chemical reaction: $2\text{CH}_4 \rightarrow \text{C}_2\text{H}_2 + 3\text{H}_2$. In principle, under careful kinetic studies on the pyrolysis of methane it has been shown that it is possible to obtain high yields of acetylene where the main by-product is hydrogen, instead of tars and acetylene black. Such studies also showed that pyrolysis in the presence of
30 hydrogen suppressed carbon formation.

In practice, a range of other hydrocarbons, specifically the light olefins and solid carbon, are always formed as byproducts with

acetylene if the reaction condition is not well controlled. Equilibrium thermodynamic calculations predict a yield of acetylene at 38%, but plasma conversion experiments indicate acetylene yields are as high as 70-85%. Solid carbon formation can be as low as 10%.

5 Experiments using the fast quench system of this disclosure have revealed that the methane decomposition to acetylene is kinetics controlled rather than equilibrium controlled. These results point to the advantage of high quench rates which provide opportunities to preserve high temperature equilibrium products.

10 Figures 6 and 7 respectively show the equilibrium compositions of methane conversion to acetylene with (Fig. 6) and without (Fig. 7) solid carbon nucleation in the reaction. It is clearly seen from these results that if C_2H_2 is allowed to 'slowly' reach equilibrium at low temperatures it will decompose to acetylene black. Therefore, to
15 maximize acetylene formation, the nucleation of solid carbon from acetylene must be suppressed at all temperatures. From classical nucleation theory, the nucleation rate, I_i , of solid carbon from a supersaturated hydrocarbon vapor species i is given by:

$$I_i = I_0 \sigma^{1/2} \left(\frac{P_i}{T} \right)^2 \exp \left(- \frac{16 \pi \sigma^3 v^2}{3 k T (\ln SS)^2} \right)$$

20 where σ is surface tension, P_i is the vapor pressure of species i , and v is the molecular volume of species i . SS , a ratio of P_i/P_{∞} , is the supersaturation of species i with its solid at temperature T . $\ln SS$ is the degree of supersaturation of the vapor pressure of species i at the specific temperature T .

25 The homogeneous nucleation of carbon solid from the supersaturated hydrocarbon vapor species i occurs by the following sequence of events:

1. The gas-phase reaction proceeds until the supersaturation exceeds a certain critical value ($>10^5$ or $\ln SS \geq 5$).

2. The nucleation occurs like a burst over a relatively short time period (10^{-6} s).
3. The nucleation terminates due to the loss of nucleating species in the gas phase which are depleted by diffusion to the freshly formed particles.

5

From the equation above, it is clear that the degree of supersaturation from the chemical species controls the byproduct carbon nucleation from the gas phase reaction. Calculation of $\ln SS$ will indicate the most probable carbon precipitation mechanism.

10

One prior published report fed methane into the flow of an argon plasma jet, and the experimental results showed about 80% acetylene was formed in the reaction. On the contrary, thermodynamic equilibrium calculations predicted a C_2H_2 composition of 38% in equilibrium with solid carbon. The result indicated acetylene is a high temperature metastable compound and that it will decompose to "acetylene black" if the gas is allowed to reach low temperature equilibrium slowly. Table 2 illustrates the dependence of $C(s)$ nucleation on the magnitude of $\ln SS$ by some of the participating reactions. On the other hand, if solid carbon formation could be prevented, then the equilibrium calculation (Fig. 7) showed acetylene would be the favored product over a much wider temperature range. This calculation demonstrates that if the kinetics of methane pyrolysis reaction can be controlled, the yield of C_2H_2 can be maximized at the theoretical reaction. This led to the present attempt to identify the kinetic conditions for quenching the reaction in a manner that carbon solid nucleation from acetylene is prevented.

15

20

25

TABLE 2

	Reaction	Temperature K	Log K_p (or $\ln SS$)
	$C(g) = C(s)$	3200	-0.18
		3000	0.17
		2800	0.59
	$1/2C_2(g) = C(s)$	3400	-1.77
		3200	-1.61
		3000	0.41
5	$1/3C_3(g) = C(s)$	3200	-1.58
		3000	1.39
		2800	2.55
	$1/2C_2H(g) = C(s) + 1/4H_2$	3000	0.86
		2500	1.17
		2000	2.8
	$1/2C_2H_2(g) = C(s) + 1/2H_2$	2000	-5.48
		1500	-8.28

10 From Figs. 6 and 7, as well as in Table 2, it can be seen that species such as $C(g)$, $C_2(g)$, $C_3(g)$, and $C_2H(g)$, are not strongly favored for carbon precipitation down to 2000 K. On the other hand, the carbon nucleation rate from C_2H_2 is extremely high starting at 2000 K because $(\ln SS)^2$ is very large, and acetylene decomposition to acetylene
15 black is favored. Therefore, acetylene will decompose to solid carbon if it is allowed to reach equilibrium "slowly" at temperatures below 2000 K. In order to maximize the acetylene yield, the overall gas temperature after mixing with injected methane must reach a value between 2000-2500 K. It is necessary to quench from these
20 temperatures to <500 K in a very short time to suppress solid carbon nucleation.

As previously stated, the super fast quench phenomena observed in this reactor is achieved by rapidly converting thermal energy in the gases to kinetic energy via a modified adiabatic and isentropic
25 expansion through a converging-diverging nozzle. In the process, the gas temperature and pressure drop extremely fast and the gas reaches supersonic velocity. Acetylene is more stable than other alkanes or

alkenes at temperatures above 2000 K. This is a consequence of the fact that the free energy of acetylene decreases at elevated temperatures compared to other hydrocarbons. However, because this window of opportunity is very short-lived ($< 10^{-3}$ sec) in a high temperature
5 pyrolysis reactor, to stabilize maximum conversion of acetylene, it is necessary to rapidly cool the emerging gas below 600 K to prevent decomposition to carbon, hydrogen, or acetylene condensation products (tars). To understand the acetylene quench phenomenon in this reactor, it is necessary to investigate the changes in the temperature, pressure,
10 and velocity of the gases as a function of the previously-described changes in reactor geometry.

Assume that the final temperature drops almost by a factor of 4, which is easily attainable through the quench nozzle, if the final temperature in the quench chamber for the acetylene reaction is 500 K,
15 then the initial temperature before the quench nozzle would be around 2000 K. This temperature would be associated with maximum acetylene conversion (Fig. 6), and the nucleation of solid carbon would be suppressed. To achieve maximum C_2H_2 yield, the average temperature should be between 2500 to 2000 K after CH_4 injection,
20 followed by quenching the gas composition immediately to < 500 K to stabilize the acetylene.

Locating the proper temperature zone for maximum C_2H_2 formation before quenching is important to minimize solid carbon nucleation. The plasma temperature is very high ($>> 5000$ K) and the plasma gas is
25 very viscous. This temperature will need to be cooled to an average of 2500-2000 K by mixing with injected methane for maximum acetylene yield. To achieve good mixing between methane and plasma gas to reach a uniform average reaction temperature it is necessary to overcome the high viscosity of the plasma gas. The window of
30 opportunity for stabilizing maximum acetylene yield is very narrow and short. Therefore, defining the location of methane injection and

position of the nozzle for immediate quenching of the product is extremely important.

In a proof of concept study, a Plasma Fast Quench Reactor was designed and built, utilizing expansive cooling to convert methane to acetylene. It was constructed basically as shown in Figs. 1 and 2.

Hydrogen was used as a reactive plasma gas to heat methane to reaction temperatures and also served as a suppressant for solid carbon nucleation from the reaction. Downstream in the nozzle region, hydrogen could be used as an optional coolant of the diverging section of the nozzle if it is desirable. Initial experiments of methane conversion based on carbon balances yielded a product, in a single pass, consisting of 71% acetylene, 27% carbon black and 2% ethylene. The product gas also contained hydrogen as a by-product.

The best conversion observed in a series of experiments resulted in a product consisting of approximately 85% acetylene, 10% carbon black, and the balance other hydrocarbon gases. Besides carbonaceous products, hydrogen was also produced as a by product. These limited experiments clearly demonstrated the feasibility of the process and the potential superiority to any of the existing processes. In addition to the high conversion efficiency, the process has other significant features:

- * The process has a very high selectivity to acetylene production.
- * The system is very simple and compact, suggesting that capital costs for implementing it will be low.
- * The converging-diverging nozzle converted thermal energy to kinetic energy. Gas velocity downstream from the nozzle was believed to be supersonic; opportunities to use this kinetic energy to drive a turbine-generator are obvious.
- * By-product hydrogen could be used as feed stock for other processes or could be burned to drive a turbine generator to provide additional electrical power to the process.

- * The acetylene can be converted to other high value commodity chemicals by applying established chemical processes downstream of the reactor.

5 EXAMPLE 4 - OTHER APPLICATIONS

Table 3 is a condensation of information relating to application of this system to already proven end products. It lists reactants and plasma gas combinations that have successfully produced the identified products.

- 10 Since a number of modifications and changes in system configuration, operating set point and gas mixture were required to successfully demonstrate the hydrogen reduction of UF_6 to uranium metal a more detailed description is given below. Preliminary problems that had to be solved were an insufficient degree of quenching, caused by less than
- 15 optimum operation of the supersonic, converging-diverging nozzle, insufficient heat content (enthalpy) and temperature in the plasma gas, and poor mixing of the injected UF_6 with the plasma gas.

- In order to increase the degree of quenching (by increasing the Mach number at which the converging-diverging nozzle operated the
- 20 system operating pressure was increased to approximately 40 psi.

- Operation of the plasma source (torch) at this elevated pressure on a mixture of argon and hydrogen resulted in poor efficiency (< 10% thermal efficiency) low plasma temperature, and energy content (enthalpy). The major source of this inefficiency was radiative heat
- 25 transfer to the cooled anode. The energy input to the plasma (enthalpy) and resulting plasma temperature at this condition were insufficient to totally dissociate the UF_6 , a condition that is necessary for successful processing. This problem was corrected by redesigning the torch anode and changing the gas mixture. The redesigned anode
- 30 was larger in diameter (7 mm) and had a constant area profile. The gas flow rate was increased to stretch the arc resulting in an increased torch voltage and energy input (enthalpy) to the plasma. The plasma

gas was changed to a mixture of Ar, He, and H₂ in the volume ratio of 65 : 32.5 : 2.5 respectively. This also increased the arc voltage and minimized the radiative heat loss from the plasma to the cooled anode thus maximizing both the enthalpy (energy content) and
5 temperature, while still providing sufficient hydrogen for reaction with the fluorine ($F_2 + H_2 \rightarrow 2HF$) and the formation of uranium-metal in the condensation region of the nozzle and reactor.

The final problem to be solved was optimization of the injector to insure "good" mixing of the UF₆ with the plasma gas. A UF₆ feed
10 system which would provide UF₆ at controlled temperature (between about 10 and about 100 C) and elevated pressure (between 40 and about 75 psi) was designed. The UF₆ gas was mixed with an argon carrier gas and transversely injected at velocities ranging from 100-600 m/s. Operation of the injector at these velocities and avoidance
15 of injector plugging and erosion required a reduction of the injector orifice size to 1-2.5. The optimum injection was found to be around 200 m/s. This condition resulted in adequate mixing and a successful experiment.

TABLE 3

Reactants	Plasma Gas	Injection Method	Injection Position	C-D Nozzle Shape (angle)	Products
$\text{TiCl}_4 + \text{H}_2$	Argon/ Hydrogen	$\text{TiCl}_4 + \text{H}_2$ @ 180 - 200°C	3.0 -6.0 mm from Torch exit	C-45° to bell shaped D-25-6°	Titanium Metal + HCL gas
$\text{VCl}_4 + \text{H}_2$	Argon/ Hydrogen	$\text{VCl}_4 + \text{H}_2$ @ 180 - 200°C	same as above	same as above	Vanadium Metal + HCl gas
$\text{AlCl}_3 + \text{H}_2$	Argon/ Hydrogen	$\text{AlCl}_3 + \text{H}_2$ @ 120 - 150°C	same as above	same as above	Aluminum Metal + HCL gas
$\text{TiCl}_4 +$ VCl_3 (or VCl_4) + H_2	Argon/ Hydrogen	$\text{TiCl}_4/\text{VCl}_3$ or H_2 @ 180 - 200°C	same as above	same as above	TiV Alloy powder + HCl gas
$\text{TiCl}_4 + \text{BCl}_3$ + H_2	Argon/ Hydrogen	TiCl_4 (liq) @ 50 psi + BCl_3 (gas) @ 50 psi + H_2	same as above	same as above	TiB_2 composite Ultrafine powder ceramic
$\text{TiCl}_4 + \text{O}_2$	Argon/ Oxygen or Oxygen	TiCl_4 (liq) @ 50 psi + O_2 (gas) @ 50 psi	TiCl_4 (liq) 1-3 mm from torch exit	C-Bell Shaped D-10 to 25° included	Ultrafine TiO_2 ceramic powder
$\text{WF}_6 + \text{H}_2$	Argon/Hy- drogen/or Hydrogen	WF_6 (g) @ 50 psi, 80- 120°C	WF_6 (g) at torch exit	C-Conical D-Conical 10- 20° included	Ultrafine Tungsten Metal powder
$\text{UF}_6 +$; Argon	Argon/Hy- drogen/Hel- ium	UF_6 (g) @ 40-75 psi, 20-100°C	UF_6 (g) at torch exit	C-Conical D-Conical 10- 20° included	Ultrafine Uranium metal powder
$\text{H}_2 + \text{CH}_4$	Argon/ Hydrogen or Hydrogen	CH_4 (gas) @ 50 -100 psi	interior of torch or 1-3 mm from torch exit	C-Bell Shaped D- 10 to 25° included	80%- Acetylene Lesser amounts of ethylene & carbon (s)
Argon + CH_4	Argon	CH_4 (gas) @ 56- 100 psi	Interior of torch or 1-3 mm from torch exit	C-Bell shaped D-10 to 25° included	Ultrafine carbon black powder

One very important commercial product listed in Table 3 is the ultrafine titanium dioxide ceramic powder obtained by oxidizing titanium tetrachloride in an oxygen enriched plasma gas. This system has been successfully used to produce an ultrafine particle size range of less than 500 nanometers, with 10-100 nanometers being the preferred range. The particles have been successfully produced within a narrow size range, meaning that 90 percent of the particles would fall within a 25 nanometer size range.

LABORATORY TESTS

An initial experiment to produce titanium metal powder was successfully conducted using the plasma fast quench process early in the development of this system. A nontransferred plasma torch was operated at 3 kW input power. Argon was bubbled through liquid titanium tetrachloride and the argon with entrained titanium tetrachloride vapor was injected into the argon plasma jet at the torch exit. Hydrogen reductant was injected normal to the plasma at a position 180° and directly across from titanium tetrachloride injection.

The reaction chamber, converging/diverging nozzle and downstream cooling section were constructed of copper coated with an alumina type ceramic. The purpose of the ceramic was to prevent corrosion of the cooper by HCl produced in this process and reduce heat loss from the reaction zone.

The reactor chamber for this original system test was 2.0 cm in diameter by 10.0 cm in length. The quench section consisted of a 90° included angle converging section followed by a 3.0 mm diameter throat and a 90° included angle diverging section issuing into a 4.0 cm diameter by 20 cm long cool down section. Four tangential hydrogen gas jets (1.0 mm diam) were placed in the diverging section of the nozzle approximately 5 mm downstream from the nozzle throat. Injection of cold hydrogen gas at this point seemed to improved yields of titanium. It was later learned that even better quenching could be

accomplished by reducing the expansion angle of the diverging section of the nozzle to less than a 20° included angle, with the optimum diverging included angle being 6° to 14°.

As a further example of dimensional design for a laboratory-scale reactor, subsequent tests were conducted using a reactor chamber length of 20 mm, although tests have been conducted with reactor chamber lengths ranging to 150 mm lengths. The plasma inlet opening was 6 mm and the reactor chamber interior diameter was 11 mm. The downstream cool down section after the nozzle was typically 1 to 1.3 m, although lengths ranging from .3 to 4 m have been tested. The cool down section can be constructed as long as required to reach a desired final temperature in the exiting gaseous stream and products contained within it.

The system used for proof of concept experiments was based on relatively crude approximations of anticipated velocity, pressure, and temperature profiles. While formation of carbon black is of concern because it reduces yield, this can be minimized by experimentally determining the optimum location of quenching. Similarly, the choice of materials of construction for this equipment can be important, as certain materials catalyze undesirable reactions or conversely can catalyze the desirable reactions.

Titanium metal powder production in the early laboratory device was on the order of 0.1 to 0.5 grams per hour. This yield was improved to 0.5 to 1.0 gram per hour by (1) optimizing the geometry of the reactor; (2) addition of 1 to 5% hydrogen to the argon plasma gas to increase heat to the process while also preheating the hydrogen reductant for reaction with titanium tetrachloride; (3) injecting liquid or vaporized titanium tetrachloride into the reaction zone with a minimum of carrier gas; and (4) use of hydrogen as the carrier gas.

The quench reaction zone geometry was optimized by conducting two dimensional modeling of the fluid dynamics of such a system. Modeling results determined that reaction zone diameter should be no

larger than 200% of the plasma torch anode exit diameter with the optimum being 110% to 150%. This prevents recirculation of reaction gases in the reaction zone which would contribute to undesirable side reactions and decrease product yields.

- 5 Gas temperatures were measured experimentally along an elongated reaction section and were also modeled using a two dimensional fluid dynamics model to determine the optimum length of the reaction zone before the converging section. A reaction zone length was chosen from this data for a given plasma input power level, plasma gas flow,
10 and reactant input rate which would result in gas temperatures at the entrance to the nozzle throat to be greater than the required equilibrium temperature of the desired end product - 4000 K (for production of titanium).

- A high aspect ratio converging section was designed such that the
15 radius of the convex and concave surfaces leading into the nozzle throat were approximately equal to the diameter of the nozzle throat. This converging geometry allows achieving the highest possible velocity at the entrance to the nozzle throat while limiting heat loss to the walls of the converging section or separation of the gas flow from the
20 converging surface.

- The optimum area (diameter) of the nozzle throat was calculated from equations available in texts pertaining to nozzle design. The nozzle throat was designed so that with the temperature, gas composition, mass flow, and pressure of the gas entering the nozzle
25 known (or estimated) sonic or near sonic gas velocities are achieved in the nozzle throat. To achieve maximum cooling (temperature drop) the nozzle throat should be as short as possible. This is demonstrated by two equations for two-dimensional nozzle flow, with R and h designating the radius of curvature and throat height respectively:

$$\left[\frac{d\left(\frac{T}{T_o}\right)}{dt} \right]^* = -(R^* h^*)^{1/2} \frac{\gamma - 1}{\left(\frac{\gamma + 1}{2}\right)^2} a_o$$

$$\left[\frac{d\left(\frac{T}{T_o}\right)}{dt} \right]^* = -C a_o (R^* h^*)^{-1/2}$$

where T_o and a_o are the gas temperature and speed of sound respectively in the reaction zone. In the second equation above, all constants for a given gas are collected in C. for air ($\gamma = 7/5$ or 1.4, $C = 0.278$). Examination of these equations shows that greater
 5 cooling rates occur for smaller nozzle diameters and shorter nozzle lengths with generally smaller R^* and h^* .

The divergence angle and area at the exit of the diverging nozzle were determined from standard texts on fluid dynamics and aerospace rocket motor design. In addition, two dimensional models of fluid
 10 flow under expected experimental conditions were also used to optimize the divergence angle and exit area of the nozzle. It was concluded that the optimum divergence included angle was less than 35° and preferably in the range of 10° to 14° for optimum expansion and acceleration of the gas. The maximum exit area (diameter) of the
 15 diverging nozzle was again determined by calculation from equations available in standard texts on fluid flow and rocket engine design.

The maximum allowable nozzle exit area depends on the mass flow through the nozzle and pressure difference between the reaction zone and the downstream cooling section. Choice of too large an expansion
 20 angle or too large an exit area will result in the gas flow "peeling off" or separating from the wall, which results in the undesirable conditions of turbulence, gas recirculation, gas reheating, and side or back reaction degradation of the desired end products.

The purpose of the cool down section of the plasma fast quench reactor device is to reduce the gas velocity while removing heat energy (which results from the decrease in velocity) in the gas at a rate sufficient to prevent the gas from increasing in kinetic temperature.

5 Passage of the gaseous stream through the restrictive nozzle opening reduces its kinetic temperature, but remove no energy from the gas. The exiting gaseous stream is slowly warmed as some random motion of the gaseous contents is restored. This heat must be immediately removed from the system as it is produce, thereby maintaining the

10 kinetic temperature of the resulting gaseous stream at a desired equilibrium level and preventing back reactions downstream from the nozzle.

In the case of experimental work to date this "cool down" has been accomplished by the use of length of water cooled tube having the

15 same internal diameter as the internal exit diameter of the diverging section of the nozzle. With other applications of this device, it may be more desirable to supplement gas cooling by use of other types of heat exchangers.

Plasma quench processes for production of ultrafine materials require

20 product collection capability downstream of the quench nozzle, preferably downstream of the cool down section. Bench scale experiments to date have used cyclonic collectors of standard dimensions described in the literature for gas and mass flows several time smaller than called for in the literature. This accommodates sonic or near

25 sonic gas velocities through the cyclones. which allows efficient removal of ultrafine material (10 to 50 nm diameter powders).

In addition to mass flow and nozzle diameter, the third process parameter that determines the temperature drop across the nozzle is the ratio of the up stream pressure (P_0 , in reaction zone) to the

30 downstream pressure (P_1 , cool down zone). In bench scale tests for the production of titanium metal powder and other materials. the ratio P_0/P_1 of 0.01 to 0.26 was maintained. The experimental systems were


operated with the reaction zone pressure of approximately 700 to 800 Torr (ca. 1 atm.) and downstream pressure maintained between 10 and 200 Torr (0.26 to 0.01 atm.). In bench scale experiments, the low downstream pressure was accomplished using a mechanical vacuum
5 pump.

For large scale production of ultrafine powders, it is expected that the quench system would be designed to operate with elevated pressures in the plasma torch and reaction chamber of 5 to 10 atmospheres pressure. This would accomplish the desired pressure drop across the
10 nozzle while reducing or possibly eliminating the need for a vacuum device to lower the pressure on the downstream side of the nozzle.

Using design considerations given in the section above and equations outlined in published texts relating to nozzles, a bench scale reactor was constructed for synthesis of titanium, vanadium, aluminum, and
15 Ti/V Alloys. This equipment was designed for operation at 12 KW input power to the plasma torch, using a plasma gas flow of 50 scfh and a plasma gas made up of 95% argon and 5% hydrogen gas. The equipment used to produce these materials consisted of a small bench scale plasma torch operated at 12 kW electrical input power attached
20 to a reactor section, quench nozzle, cyclone powder collector, liquid nitrogen cold trap to collect by-product HCl, and mechanical vacuum pump.

To produce titanium metal particles, titanium tetrachloride was heated above its boiling point and injected into the reaction chamber at the
25 junction between the plasma torch and the reaction section. The reaction section, quench nozzle, and expansion chamber were constructed of water cooled nickel. The reaction section was 11.0 mm inside diameter and 150.0 mm in length. The quench nozzle section consisted of a high aspect ratio converging section followed by a 6.2 mm
30 nozzle, and 12° included angle expansion section followed a 20.0 mm I.D., 50.0 cm cool down section. The cooled mixture of titanium powder and gas was passed through two sonic cyclone particle


separators to collect the ultrafine powder. Hydrogen chloride vapor was condensed out in a liquid nitrogen cooled cold trap to prevent damage to the mechanical vacuum pump down stream from the particle collection. Titanium was produced according to equation (1) below:





5

Ultrafine vanadium metal powder was produced using the bench scale apparatus described above. Vanadium tetrachloride liquid (B.P. 145°C) was heated to vapor and injected in the same manner as titanium tetrachloride described above with hydrogen carrier gas. Ultrafine


10 vanadium metal powder was produced at the rate of a 0.5 gram per hour according to one of the following equations:



An ultrafine powder consisting of an alloy of titanium and vanadium was produced by two methods. Method 1 used a mixture of solid
15 vanadium trichloride dissolved in liquid titanium tetrachloride. This mixture was then heated to vapor and injected into the plasma quench reactor in the same manner as with titanium above. In Method 2, vaporized liquid vanadium tetrachloride and vaporized liquid titanium tetrachloride were injected into the plasma quench reactor using separate
20 injectors located in the same axial position but 180° apart on the circumference of the reactor. The chemical equations used are:



Ultrafine aluminum metal powder was produced by vaporizing (subliming) solid aluminum trichloride in a specially designed oven and carried into the plasma quench reactor in a stream of hydrogen gas in the manner described for titanium above. Special care was needed to insure all sections of the injection system were maintained above 200°C to prevent formation of solid aluminum trichloride. The process utilized the following equation:



In compliance with the statute, the invention has been described in language more or less specific as to the experimental equipment and methodical features. It is to be understood, however, that the invention is not limited to the specific features described, since the means herein disclosed comprise preferred forms of putting the invention into effect. The invention is, therefore, claimed in any of its forms or modifications within the proper scope of the appended claims appropriately interpreted in accordance with the doctrine of equivalents.

CLAIMS:

1 1. A fast quench reactor for thermal conversion of one or
2 more reactants in a thermodynamically stable high temperature gaseous
3 stream to a desired end product in the form of a gas or ultrafine solid
4 particles, comprising:

5 a reactor chamber having axially spaced inlet and outlet ends
6 along a reactor axis;

7 a high temperature heating means positioned at the inlet end
8 of the reactor chamber;

9 a reactant stream inlet for introducing a stream comprising at
10 least one reactant within the reactor chamber where said stream is
11 heated by said high temperature heating means to produce a hot
12 gaseous stream flowing axially toward the outlet end of the reactor
13 chamber;

14 the reactor chamber having a predetermined length sufficient
15 to effect heating of the reactant stream by the high temperature
16 heating means to a selected equilibrium temperature at which a
17 desired end product is available within the reactant stream as a
18 thermodynamically stable reaction product at a location adjacent the
19 outlet end of the reaction chamber;

20 a convergent-divergent nozzle located coaxially within the outlet
21 end of the reactor chamber for rapidly cooling the gaseous stream
22 by converting thermal energy to kinetic energy as a result of
23 adiabatic and isentropic expansion as the gaseous stream flows axially
24 through the nozzle; and

25 a cool down chamber leading from the nozzle for retaining
26 the desired end product within the flowing gaseous stream, and
27 wherein the nozzle and cool down chamber are designed to minimize
28 back reactions.

1 2. The fast quench reactor of claim 1, wherein the high
2 temperature heating means comprises a plasma torch and a plasma arc
3 inlet for introducing a stream of plasma arc gas to the plasma torch
4 to produce a plasma within the reaction chamber and extending toward
5 the outlet end of the reaction chamber, the plasma containing at least
6 one reactant, whereby the inlet reactant stream is mixed into the plasma
7 to progressively effect heat transfer between the plasma and a resulting
8 gaseous stream.

1 3. The fast quench reactor of claim 2, further comprising:
2 a reactant inlet connected to a source of gas which dissociates
3 at or below the equilibrium temperature to produce the desired end
4 product.

1 4. The fast quench reactor of claim 2 further comprising:
2
3 separate reactant inlets respectively connected to sources of two
4 different gaseous reactants which react with one another at or below
5 the equilibrium temperature to produce the desired end product.

1 5. The fast quench reactor of claim 2 wherein the
2 minimum temperature within the reactor chamber is between about
3 1700°C and about 4000°C.

1 6. The fast quench reactor of claim 2 wherein the
2 maximum temperature of the gaseous stream exiting the nozzle is less
3 than about 500°C.

1 7. The fast quench reactor of claim 2 further comprising:
2 a reactant inlet operably connected to a source of reactant
3 under positive pressure, whereby the reactant is positively injected
4 into the reactor chamber to penetrate and mix with the plasma.

1 8. The fast quench reactor of claim 2, further comprising:
2 a product collector positioned downstream from the cool down
3 chamber.

1 9. The fast quench reactor of claim 2, further comprising:
2 an external cooling system operably connected to the cool
3 down section.

1 10. The fast quench reactor of claim 2, wherein both the
2 exit opening and reactor chamber are coaxially centered along the
3 reactor axis.

1 11. The fast quench reactor of claim 2, wherein both the
2 exit opening and reactor chamber are coaxially centered along the
3 reactor axis, the width of the reactor chamber being no larger than
4 approximately 200% of the exit opening width.

1 12. The fast quench reactor of claim 2, wherein both the
2 torch exit and reactor chamber are circular in cross section and are
3 coaxially centered along the reactor axis, the diameter of the reactor
4 chamber being in the range of approximately 110% to 150% of the
5 exit opening diameter.

1 13. The fast quench reactor of claim 2, wherein the nozzle
2 has a converging section and a diverging section respectively leading
3 to and from a restrictive open throat; the converging section of the
4 nozzle having a
5 high aspect ratio.

1 14. The fast quench reactor of claim 2, wherein the nozzle
2 has a converging section and a diverging section respectively leading
3 to and from a restrictive open throat; the converging section of the

4 nozzle having a high aspect ratio presented by successive convex and
5 concave surfaces leading into a nozzle throat having a circular cross
6 section, the radius of the convex and concave surfaces being
- approximately equal to the diameter of the nozzle throat.

1 15. The fast quench reactor of claim 2, wherein the nozzle
2 has a converging section and a diverging section respectively leading
3 to and from a restrictive open throat; the diverging section of the
4 nozzle having a conical configuration centered along the reactor axis.

1 16. The fast quench reactor of claim 2, wherein the nozzle
2 has a converging section and a diverging section respectively leading
3 to and from a restrictive open throat; the diverging section of the
4 nozzle having a conical configuration centered along the reactor axis
5 with an included angle of less than about 35°.

1 17. The fast quench reactor of claim 2, wherein the
2 diverging section of the nozzle has a conical configuration centered
3 along the reactor axis and having an included angle in the range of
4 6° to 14°.

1 18. The fast quench reactor of claim 2, wherein the nozzle
2 has a converging section and a diverging section respectively leading
3 to and from a restrictive open throat; the fast quench reactor further
4 comprising:

5 an additional inlet leading to the throat of the nozzle for directing
6 a quenching gas into the hot gaseous stream at a rate that condenses
- a desired reaction product and inhibits formation of other equilibrium
8 products as the resulting hot gaseous stream exits the nozzle.

1 19. A fast quench plasma reactor for thermal conversion of
2 one or more reactants in a thermodynamically stable high temperature
3 gaseous stream to a desired end product in the form of a gas or
4 ultrafine solid particles, comprising:

5 an enclosed reactor chamber arranged along a reactor axis, the
6 reactor chamber having axially spaced inlet and outlet ends;

7 a plasma torch including at least one pair of electrodes
8 positioned at the inlet end of the reactor chamber;

9 a plasma arc gas inlet upstream from the electrodes for
10 introducing a stream of plasma arc gas between the electrodes at a
11 selected plasma gas flow while the electrodes are subjected to a
12 selected plasma input power level to produce a plasma within the
13 reactor chamber and extending toward the outlet end of the reactor
14 chamber, the plasma containing at least one reactant, whereby an
15 incoming reactant stream is mixed into the plasma to progressively
16 effect heat transfer between the plasma and a resulting gaseous
17 stream as the gaseous stream flows axially toward the outlet end of
18 the reactor chamber;

19 at least one reactant inlet leading into the reactor chamber at
20 or adjacent to its inlet end at a selected injection angle;

21 the reactor chamber having a predetermined length sufficient
22 to effect heating of the gaseous stream by the plasma to a selected
23 equilibrium temperature at which a desired end product is available
24 as a thermodynamically unstable reaction product at a location
25 adjacent the outlet end of the reactor chamber;

26 a coaxial convergent-divergent nozzle positioned in the outlet
27 end of the reactor chamber for rapidly cooling the gaseous stream
28 by converting thermal energy to kinetic energy as a result of
29 adiabatic and isentropic expansion as it flows axially through the
30 nozzle, the nozzle having a converging section and a diverging
31 section respectively leading to and from a restrictive open throat;

32 the converging section of the nozzle having a high aspect
33 ratio for accelerating the gaseous stream rapidly into the nozzle
34 throat while maintaining laminar flow;

35 the size of the restrictive open throat within the nozzle being
36 selected to control the residence time and reaction pressure of the
37 resulting gaseous stream in the reactor chamber;

38 the gaseous stream being accelerated to sonic velocities during
39 passage through the throat of the nozzle to transform thermal energy
40 of the moving gaseous stream into kinetic energy in the axial
41 direction of gas flow, thereby retaining the desired end product
42 within the flowing gaseous stream;

43 the diverging section of the nozzle then subjecting the gaseous
44 stream to an ultra fast decrease in pressure by smoothly accelerating
45 and expanding the moving gaseous stream;

46 a coaxial cool down chamber leading from the diverging
47 section of the nozzle for reducing the velocity of the moving
48 gaseous stream while removing heat energy at a rate sufficient to
49 prevent increases in its kinetic temperature to retain the desired end
50 product within the gaseous stream; and wherein the diverging section
51 of the nozzle and cool down chamber are designed to minimize
52 undesired side or back reactions; and

53 a product collector downstream of the cool down chamber to
54 separate a desired reaction product from the gases exiting the cool
55 down chamber.

1 20. The fast quench plasma reactor of claim 19, further
2 comprising:

3 an external cooling system operably connected to the cool
4 down section to remove heat energy from the moving gaseous stream
5 at a rate sufficient to prevent the gas from increasing in kinetic
6 temperature as it traverses the cool down chamber.

1 21. The fast quench plasma reactor of claim 19, wherein
2 both the torch includes a plasma inlet coaxially centered along the
3 reactor chamber axis and both the plasma inlet and the interior of the
4 reactor chamber are circular in cross section.

1 22. The fast quench plasma reactor of claim 19, wherein
2 both the torch includes a plasma inlet coaxially centered along the
3 reactor chamber axis and both the plasma inlet and the interior of the
4 reactor chamber are circular in cross section, the diameter of the
5 reactor chamber being no larger than approximately 200% of the torch
6 exit diameter to prevent recirculation of reaction gases in the reaction
- chamber.

1 23. The fast quench plasma reactor of claim 19, wherein
2 both the torch includes a plasma inlet coaxially centered along the
3 reactor chamber axis and both the plasma inlet and the interior of the
4 reactor chamber are circular in cross section, the diameter of the
5 reactor chamber being in the range of approximately 110% to 150% of
6 the torch exit diameter to prevent recirculation of reaction gases in the
- reaction chamber.

1 24. The fast quench plasma reactor of claim 19, wherein the
2 converging section of the nozzle has a high aspect ratio presented by
3 successive convex and concave surfaces leading into a nozzle throat
4 having a circular cross section, the radius of the convex and concave
5 surfaces being approximately equal to the diameter of the nozzle throat.

1 25. The fast quench plasma reactor of claim 19, wherein the
2 diverging section of the nozzle has a conical configuration centered
3 along the reactor axis with an included angle of less than 35° for
4 optimum expansion and acceleration of the hot gaseous stream passing
5 through it to minimize undesired side and back reactions.

1 26. The fast quench plasma reactor of claim 19, wherein the
2 diverging section of the nozzle has a conical configuration centered
3 along the reactor axis with an included angle in the range of 6° to
4 14° for optimum expansion and acceleration of the hot gaseous stream
5 passing through it.

1 27. The fast quench plasma reactor of claim 19, further
2 comprising:

3 an additional inlet leading to the throat of the nozzle for
4 directing a quenching gas into the hot gaseous stream at a rate that
5 condenses desired reaction products and inhibits formation of other
6 equilibrium products as the resulting hot gaseous stream exits the
- nozzle.

1 28. The fast quench plasma reactor of claim 19, further
2 comprising:

3 vacuum means operatively connected downstream of the
4 convergent-divergent nozzle for applying vacuum pressure to the
5 gaseous stream exiting from the nozzle.

1 29. An apparatus as set out in claim 19, further comprising:
2 first cooling means for the walls of the reactor chamber to
3 prevent reactions with its materials of construction.

1 30. An apparatus as set out in claim 19, further comprising:
2 first cooling means for the walls of the reactor chamber to
3 prevent reactions with its materials of construction; and
4 second cooling means for the convergent-divergent nozzle to
5 prevent reactions with its materials of construction.

1 31. A method for thermally converting one or more
2 reactants in a thermodynamically stable high temperature gaseous stream
3 to a desired end product in the form of a gas or ultrafine solid
4 particles, comprising the following steps:

5 introducing a reactant stream at one axial end of a reaction
6 chamber;

7 rapidly heating the incoming reactant stream as the reactant
8 stream flows axially toward the remaining end of the reactor
9 chamber;

10 the reactor chamber having a predetermined length sufficient
11 to effect heating of the gaseous stream to a selected reaction
12 temperature at which a desired end product is available as a
13 thermodynamically unstable reaction product at a location adjacent the
14 outlet end of the reactor chamber;

15 passing the gaseous stream through a restrictive convergent-
16 divergent nozzle arranged coaxially within the remaining end of the
17 reactor chamber to rapidly cool the gaseous stream by converting
18 thermal energy to kinetic energy as a result of adiabatic and
19 isentropic expansion as it flows axially through the nozzle and
20 minimizing back reactions, thereby retaining the desired end product
21 within the flowing gaseous stream; and

22 subsequently cooling and slowing the velocity of the desired
23 end product and remaining gaseous stream exiting from the nozzle.

1 32. The method of claim 31, wherein the rapid heating step
2 is accomplished by introducing a stream of plasma arc gas to a plasma
3 torch at the one axial end of said reactor chamber to produce a
4 plasma within the reaction chamber which extends toward its remaining
5 axial end.

1 33. The method of claim 31, wherein the step of rapidly
2 cooling the desired end product is accomplished by use of a converging
3 section of the nozzle having a high aspect ratio and further comprising
4 the following additional step: separating the desired end product from
5 the remaining gases in the cooled gaseous stream.

1 34. The method of claim 31, wherein the step of rapidly
2 cooling the desired end product is accomplished by use of a converging
3 section of the nozzle having a high aspect ratio presented by successive
4 convex and concave surfaces leading into a nozzle throat having a
5 circular cross section, the radius of the convex and concave surfaces
6 being approximately equal to the diameter of the nozzle throat.

1 35. The method of claim 31, wherein the step of rapidly
2 cooling the desired end product is accomplished by use of a nozzle
3 having a converging section and a diverging section respectively leading
4 to and from a restrictive open throat, the diverging section of the
5 nozzle having a conical configuration.

1 36. The method of claim 31, wherein the step of rapidly
2 cooling the desired end product is accomplished by use of a nozzle
3 having a converging section and a diverging section respectively leading
4 to and from a restrictive open throat, the diverging section of the
5 nozzle having a conical configuration with an included angle of less
6 than about 35°.

1 37. The method of claim 31, wherein the step of
2 subsequently cooling and slowing the velocity of the resulting desired
3 end product and remaining gaseous stream as it exits from the nozzle
4 is accomplished by directing a quenching gas into the gaseous stream
5 at a rate that condenses a desired end product and inhibits formation
6 of other equilibrium products as the resulting gaseous stream exits the
7 nozzle.

1 38. The method of claim 31, wherein the desired end
2 product is titanium metal and the reactants are titanium tetrachloride
3 and hydrogen.

1 39. The method of claim 31, wherein the desired end
2 product is vanadium metal and the reactants are vanadium tetrachloride
3 and hydrogen.

1 40. The method of claim 31, wherein the desired end
2 product is aluminum metal and the reactants are aluminum chloride and
3 hydrogen.

1 41. The method of claim 31, wherein the desired end
2 product is a titanium-vanadium alloy and the reactants are a mixture
3 of titanium tetrachloride and vanadium tetrachloride, plus hydrogen.

1 42. The method of claim 31, wherein the desired end
2 product is a titanium-boron composite ceramic powder and the reactants
3 are titanium tetrachloride and boron trichloride.

1 43. The method of claim 31, wherein the desired end
2 product is titanium dioxide and the reactants are titanium tetrachloride
3 and oxygen.

1 44. The method of claim 31, wherein the desired end
2 product is acetylene and the reactants are methane and hydrogen.

1 45. A method for thermal conversion of one or more
2 reactants in a thermodynamically stable high temperature gaseous stream
3 to a desired end product in the form of a gas or ultrafine solid
4 particles, comprising the following steps:

5 introducing a stream of plasma arc gas between the electrodes
6 of a plasma torch including at least one pair of electrodes positioned
7 at the inlet end of an axial reactor chamber, the stream of plasma
8 arc gas being introduced at a selected plasma gas flow while the
9 electrodes are subjected to a selected plasma input power level to
10 produce a plasma within the reactor chamber and extending toward
11 its outlet end;

12 thoroughly mixing an incoming reactant stream into the plasma
13 by injecting at least one reactant into the reactor chamber at or
14 adjacent to its inlet end at a selected injection angle and at a
15 selected reactant input rate to progressively effect heat transfer
16 between the plasma and the resulting gaseous stream as it flows
17 axially toward the outlet end of the reactor chamber;

18 the length of the reactor chamber being sufficient to effect
19 heating of the gaseous stream to a selected equilibrium temperature
20 at which a desired end product is available as a thermodynamically
21 unstable reaction product within the gaseous stream at a location
22 adjacent to the outlet end of the reactor chamber;

23 directing the gaseous stream through a coaxial convergent-
24 divergent nozzle positioned in the outlet end of the reactor chamber
25 to rapidly cool the gaseous stream by converting thermal energy to
26 kinetic energy as a result of adiabatic and isentropic expansion as
27 it flows axially through the nozzle, the nozzle having a converging
28 section and a diverging section respectively leading to and from a
29 restrictive open throat;

30 cooling the gaseous stream exiting the nozzle by reducing its
31 velocity while removing heat energy at a rate sufficient to prevent
32 increases in its kinetic temperature; and
33 separating desired end products from the gases remaining in
34 the cooled gaseous stream.

1 46. The method of claim 45, further comprising the
2 following step:

3 accelerating the gaseous stream rapidly into the nozzle throat while
4 maintaining laminar flow by passage of the gaseous stream through a
5 converging section of the nozzle having a high aspect ratio.

1 47. The method of claim 45, further comprising the
2 following step:

3 controlling the residence time and reaction pressure of the
4 gaseous stream in the reactor chamber by selection of the size of
5 the restrictive open throat within the nozzle.

1 48. The method of claim 45, further comprising the
2 following step:

3 accelerating the gaseous stream to sonic velocities during
4 passage through the throat of the nozzle to transform thermal energy
5 of the moving gaseous stream into kinetic energy in the axial
6 direction of gas flow, thereby retaining the desired end product
- within it.

1 49. The method of claim 45, further comprising the
2 following step:

3 subjecting the gaseous stream to an ultra fast decrease in
4 pressure by smoothly accelerating and expanding the moving gaseous
5 stream along the diverging section of the nozzle to further decrease
6 its kinetic temperature and prevent undesired side or back reactions.

1 50. A method for producing titanium from a titanium-
2 containing compound, comprising the following steps:
3 directing the titanium containing compound into a hot plasma
4 to decompose; and
5 retaining the titanium by rapidly expanding the resulting gases
6 and subjecting them to a cold gaseous stream.

1 51. A method for producing titanium from titanium
2 tetrachloride (TiCl_4), comprising the following steps:
3 directing titanium tetrachloride into a hot plasma to decompose
4 it to titanium and chlorine; and
5 retaining the titanium by rapidly expanding the resulting gases
6 and subjecting them to a cold gaseous stream.

1 52. The method of claim 51, further comprising the step of
2 introducing sufficient carbon to the hot plasma to prevent oxide
3 formation.

1 53. The method of claim 51, wherein the temperature of the
2 hot plasma is in excess of 4000 K.

1 54. A method for producing titanium, comprising the
2 following steps:

3 decomposing a titanium compound by introducing it as a
4 stream of vapor into a hot plasma together with one or more
5 reactants;

6 directing the resultant hot gaseous stream through a convergent-
7 divergent nozzle to allow its contents to reach thermodynamic
8 equilibrium prior to being subjected to an ultrafast decrease in
9 pressure; and

10 quenching the titanium within the hot gaseous stream by
11 introducing cold gas into it as it passes through the nozzle to cool
12 its contents at a rate that condenses titanium and inhibits formation
13 of equilibrium products as the resulting gaseous stream exits the
14 convergent-divergent nozzle.

1 55. The method of claim 54, further comprising the step of
2 introducing sufficient carbon to the hot plasma to prevent formation of
3 titanium oxides.

1 56. The method of claim 54, further comprising the step of
2 introducing methane to the hot plasma in quantities sufficient to supply
3 adequate carbon to prevent formation of titanium oxides.

1 57. The method of claim 54, further comprising the step of
2 introducing sufficient oxygen to the hot plasma to produce titanium
3 dioxide as the desired end product.

1 58. The method of claim 54, wherein the temperature of the
2 hot plasma is in excess of 4000 K.

1 59. The method of claim 54, wherein the reactants include
2 hydrogen.

1 60. The method of claim 54, wherein the stream of titanium
2 vapor is contained within argon as an inert carrier gas.


1 61. The method of claim 54, wherein the hot plasma is
2 maintained at atmospheric pressure and the resulting gaseous stream
3 exiting the convergent-divergent nozzle is at a vacuum pressure.

1 62. An elemental titanium product comprising titanium
2 dioxide particles having particle sizes that are less than 100 nm.

1 63. The elemental titanium product of claim 62, wherein the
2 titanium dioxide particles have particle sizes between 10 and 100 nm.


1 64. The elemental titanium product of claim 62, wherein the
2 titanium dioxide particles have a narrow size distribution range of plus
3 or minus 25 nm.

1/7

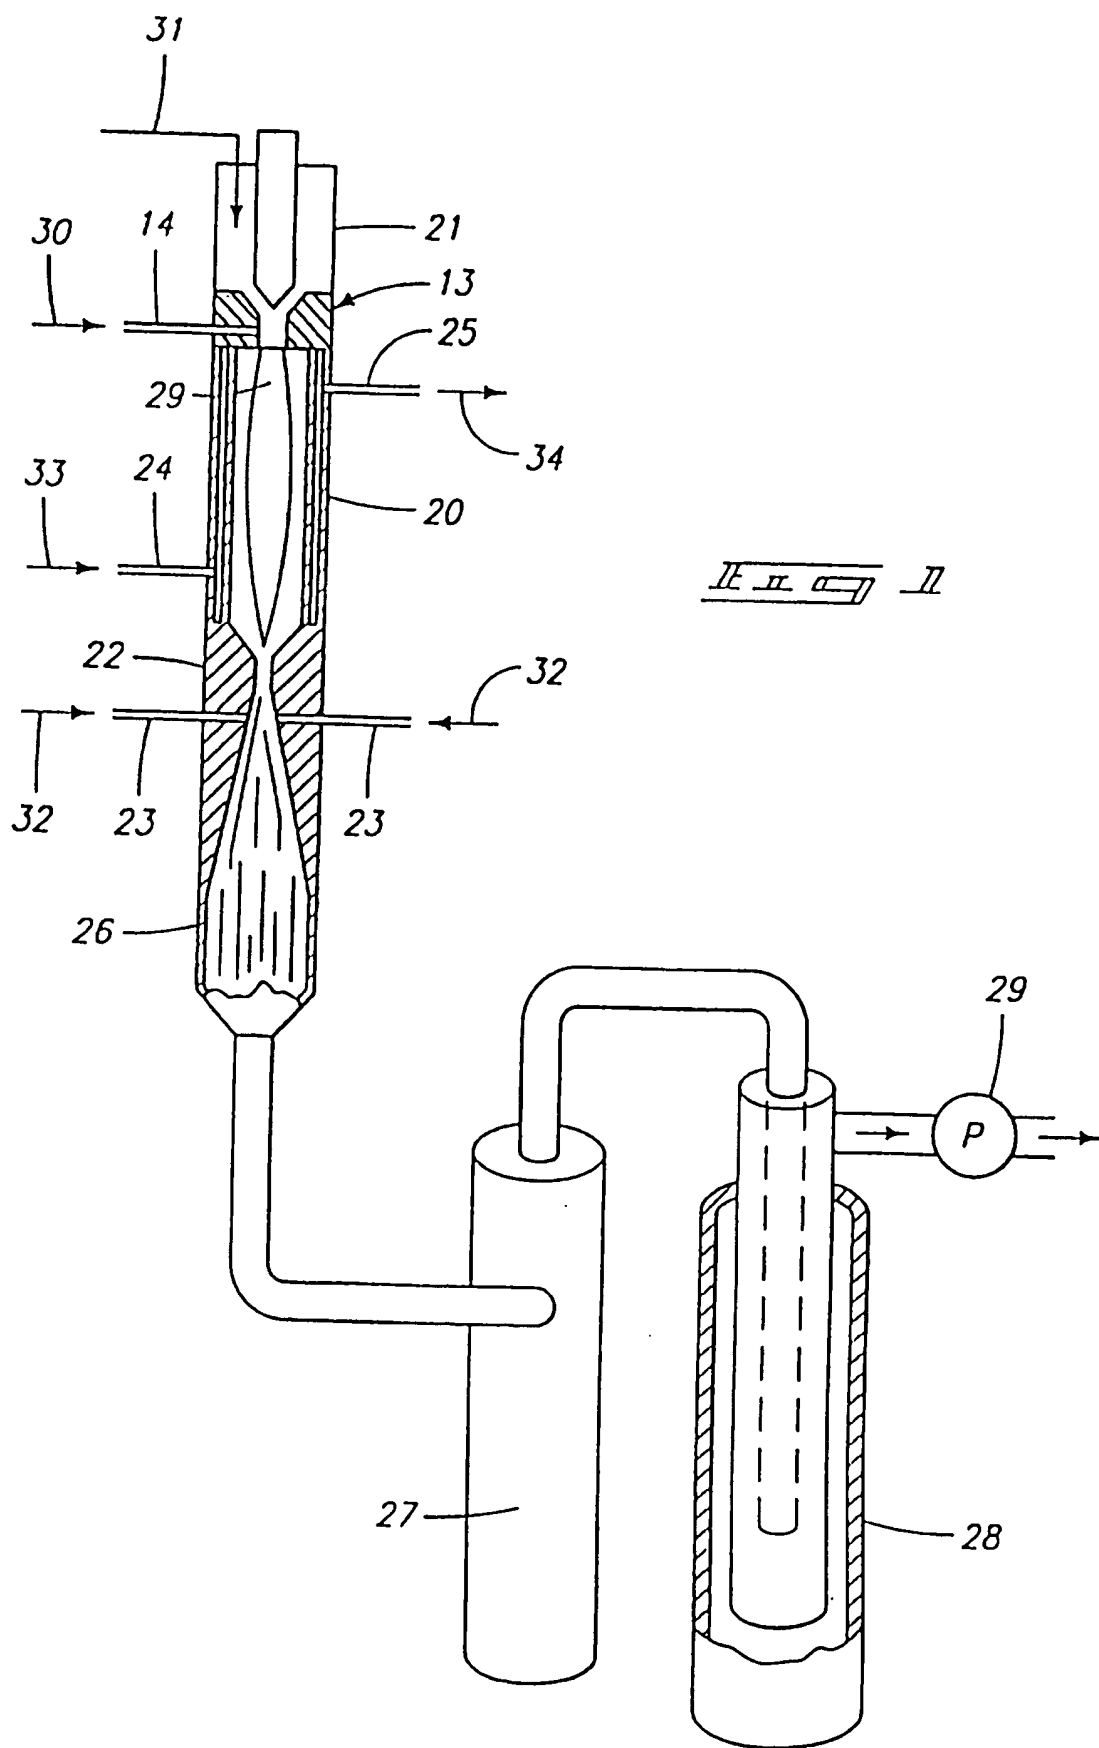


SUBSTITUTE SHEET (RULE 26)

2/7

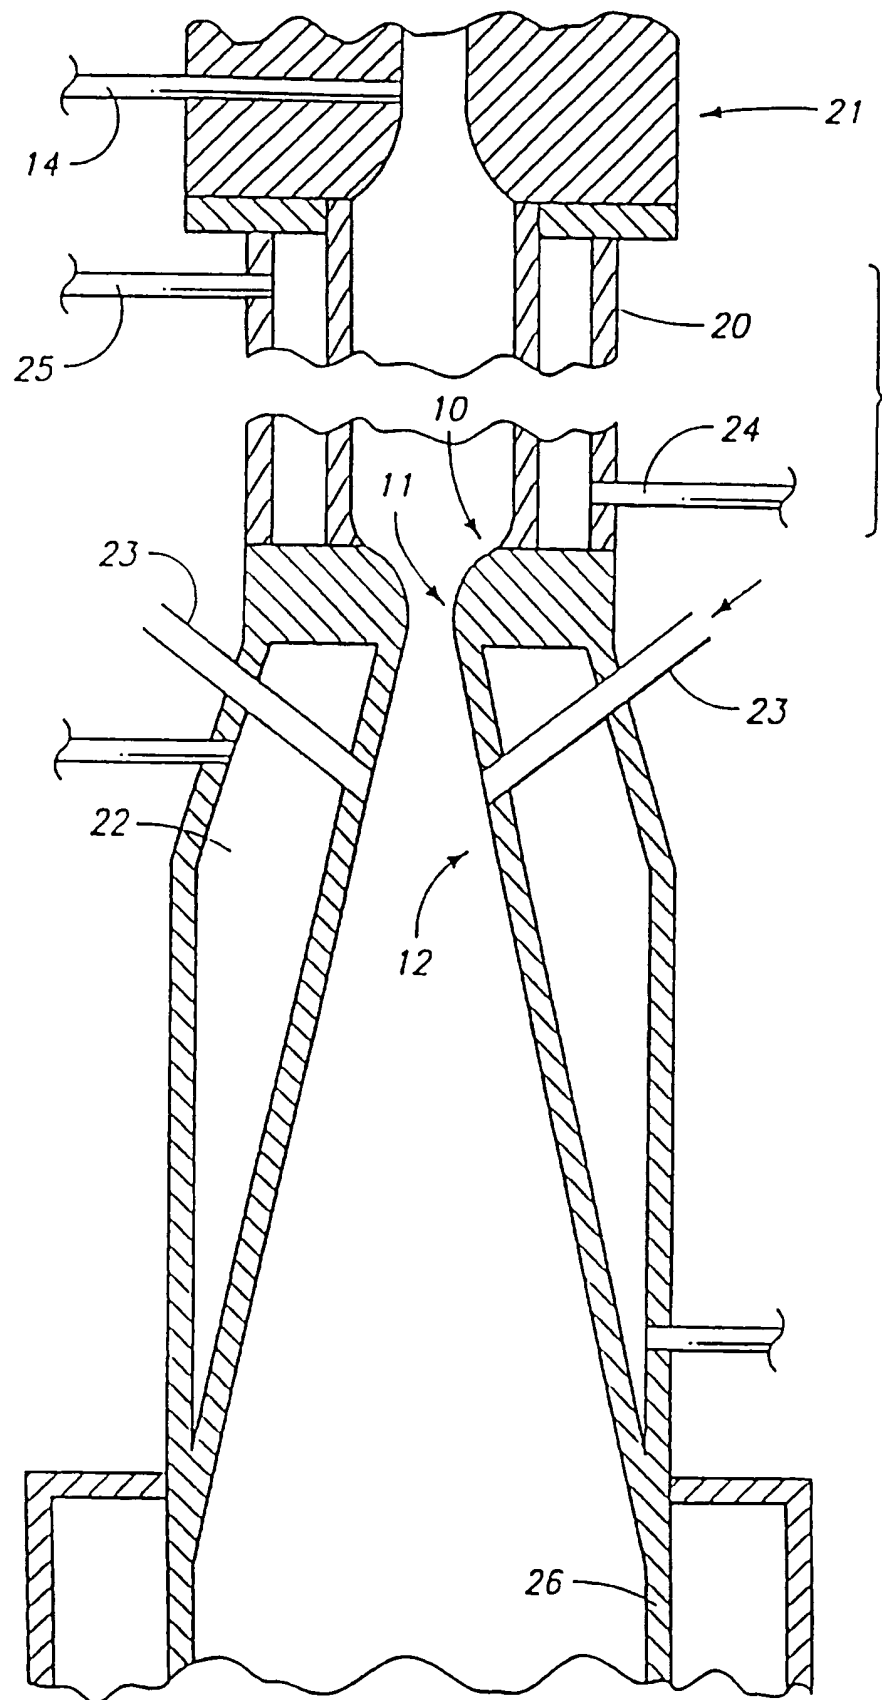


3/7

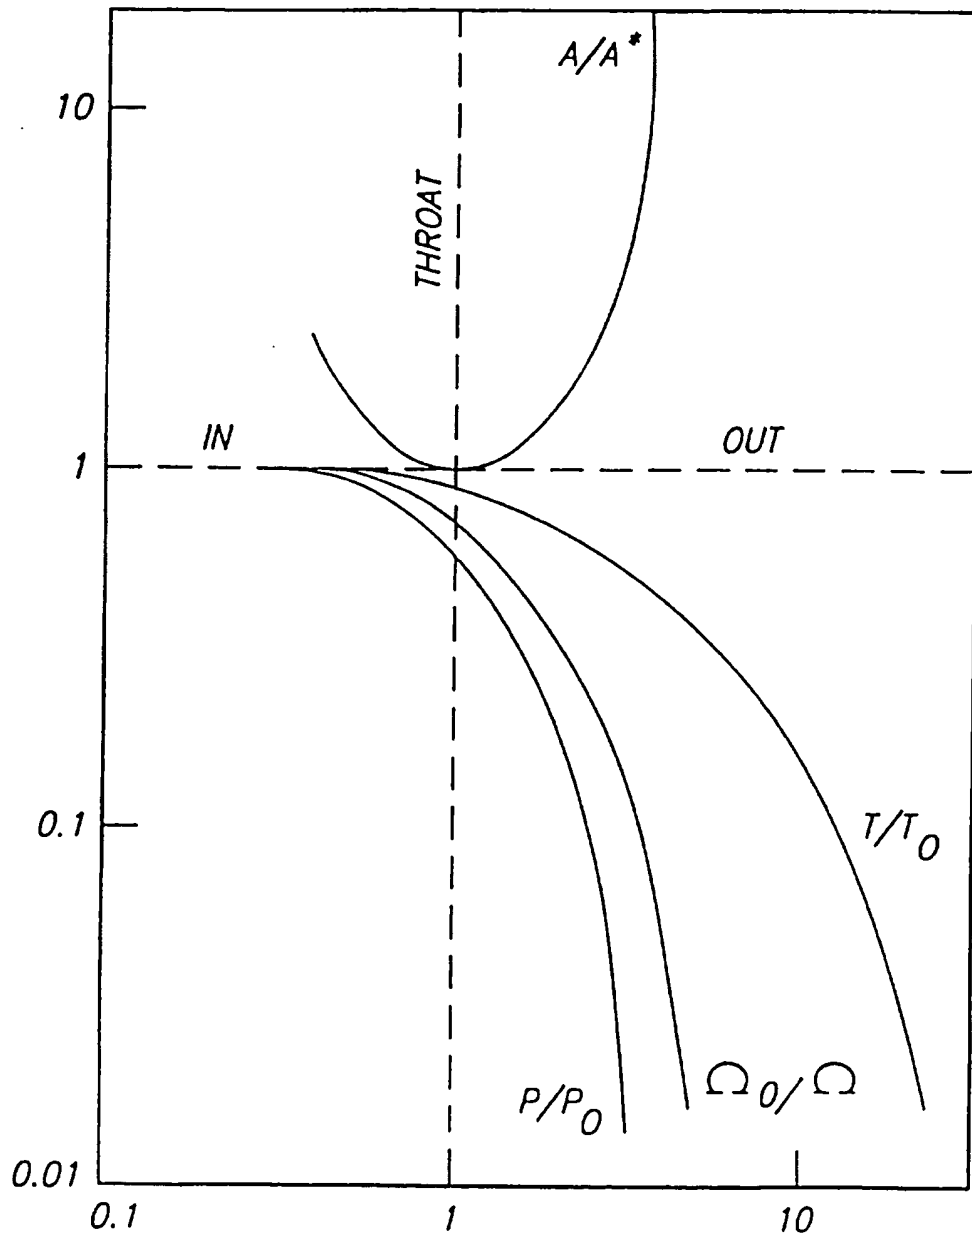


SUBSTITUTE SHEET (RULE 26)

4/7

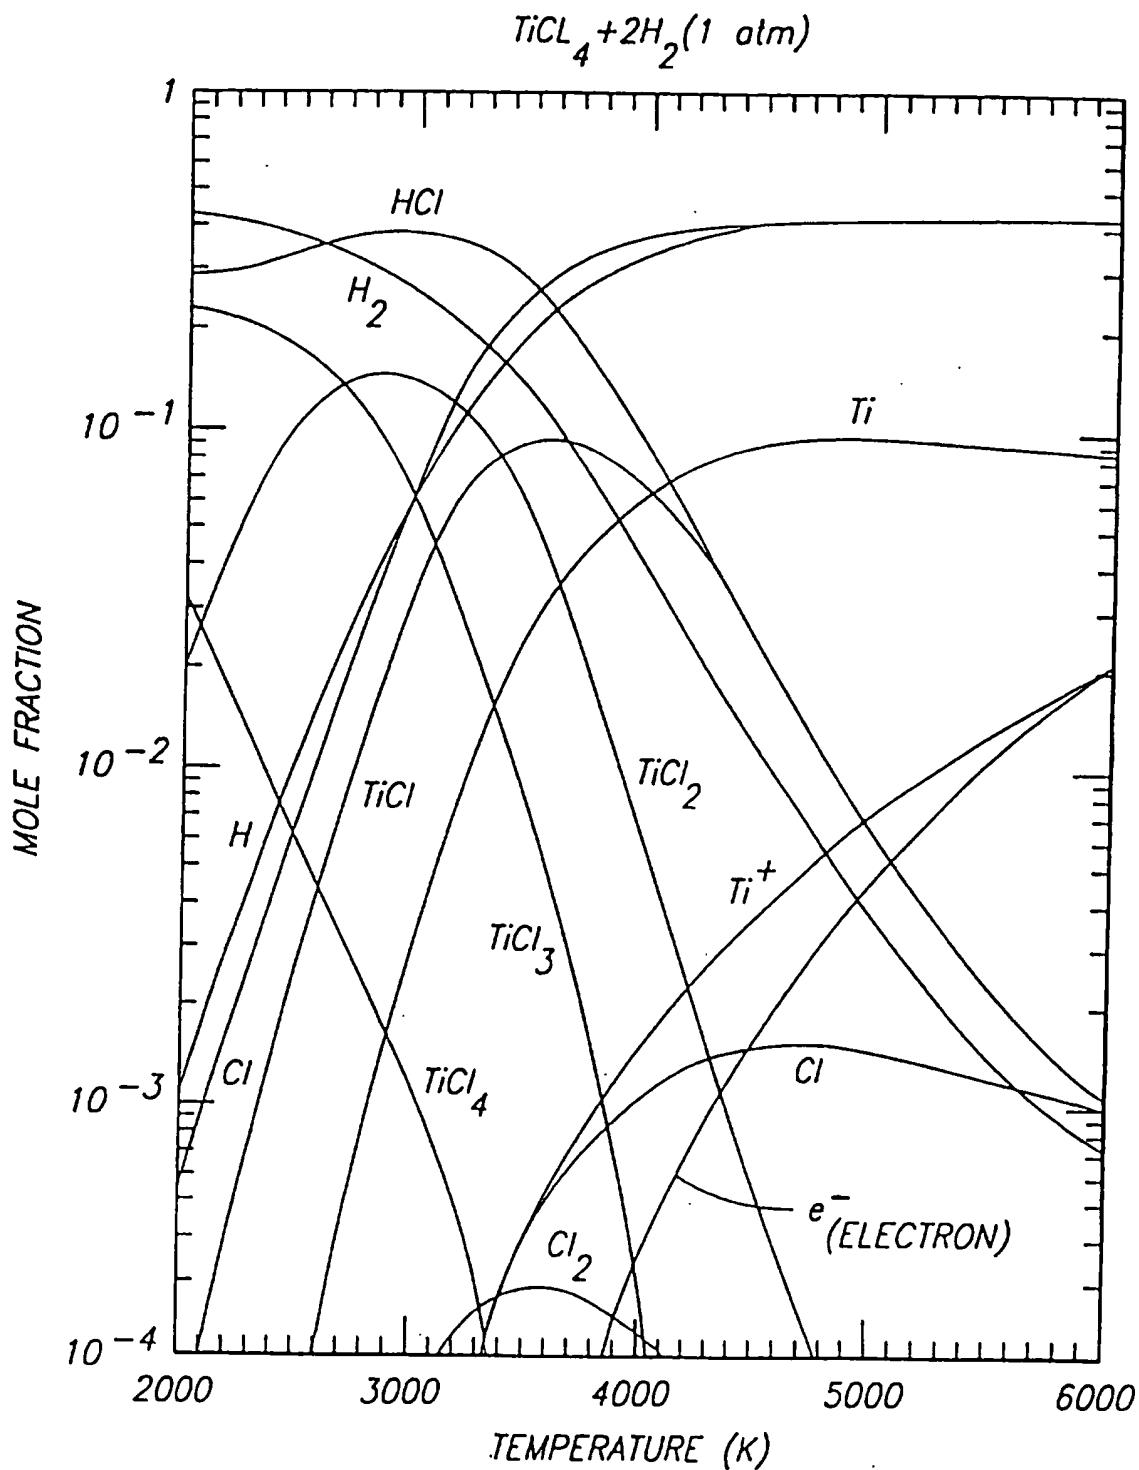


SUBSTITUTE SHEET (RULE 26)

5/7

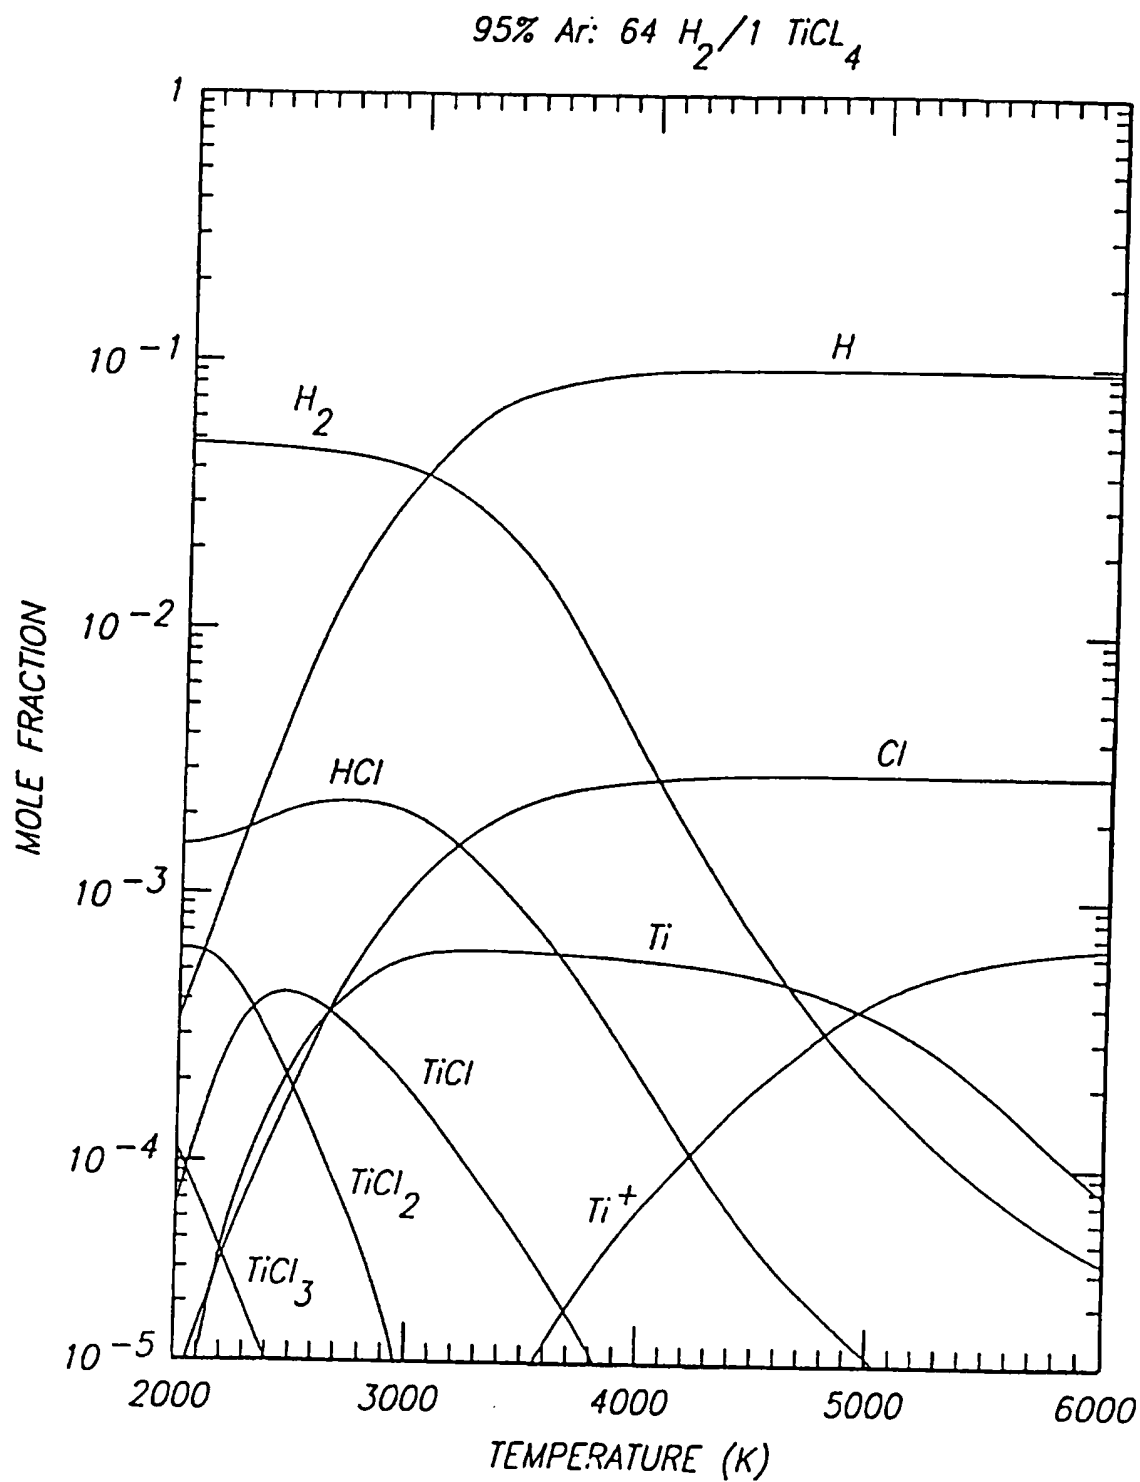II II III S


SUBSTITUTE SHEET (RULE 26)

6/7

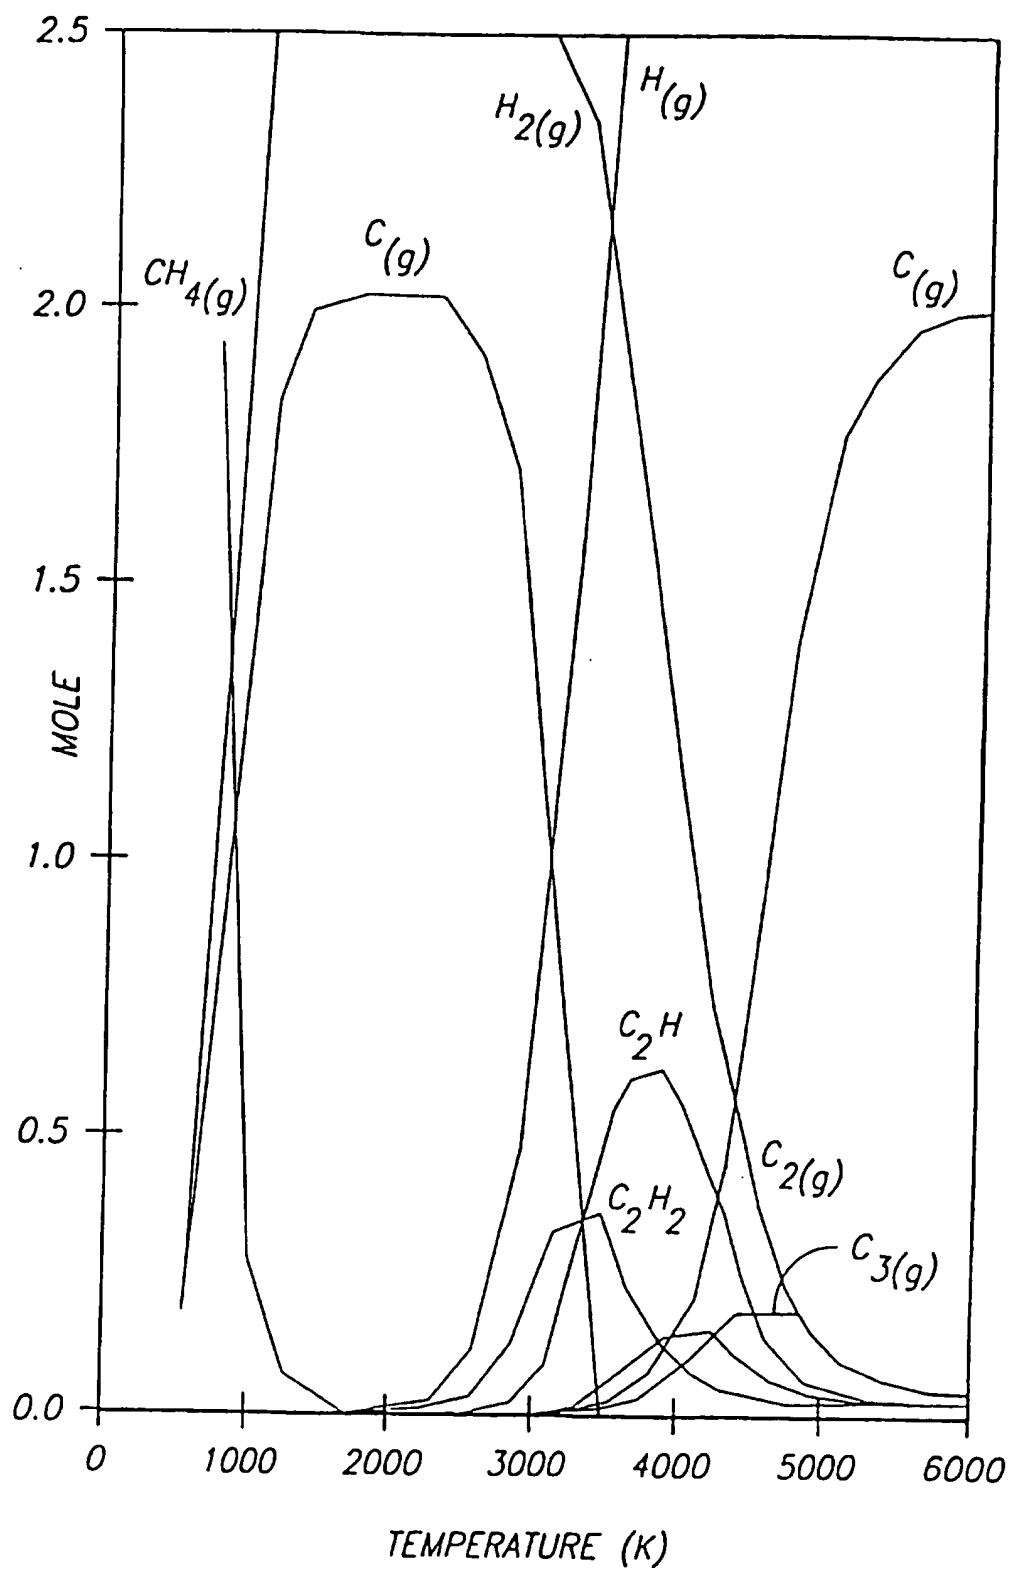

SUBSTITUTE SHEET (PRIORITY)

7/7

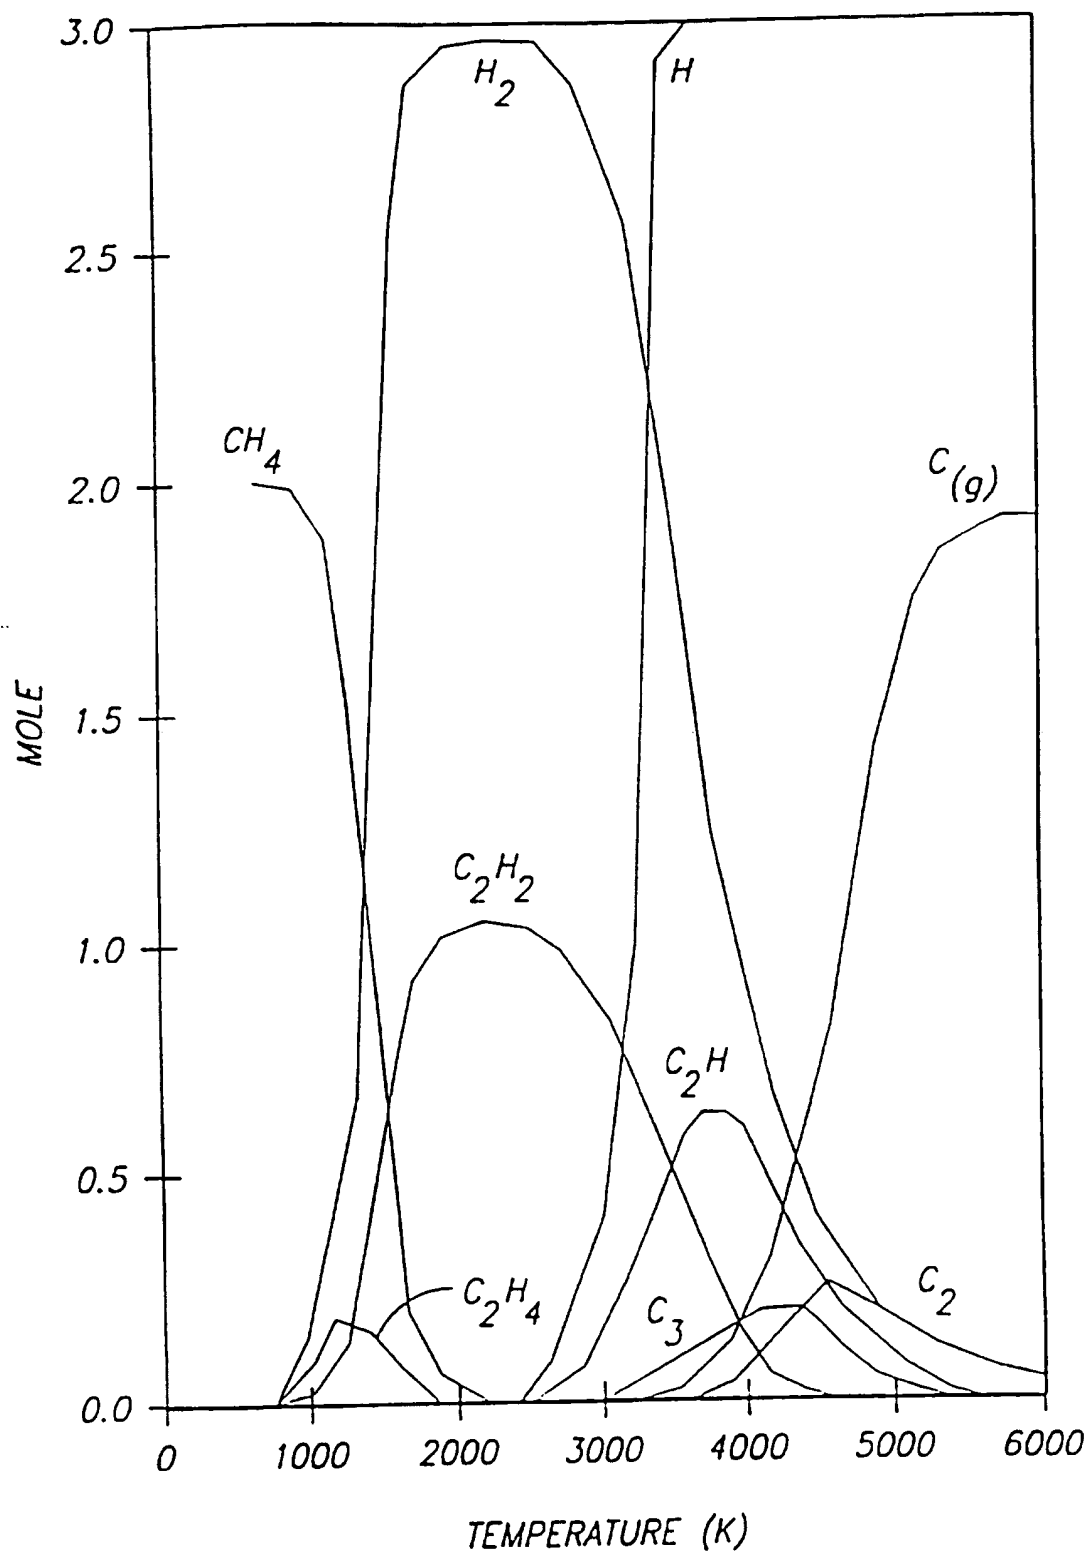

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/03581

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : C22B 4/00, 4/08

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 75/10.19, 10.21, 10.28; 420/590; 423/289, 613; 585/538; 219/121.36; 266/182; 373/18; 422/207

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 3,051,639 (ANDERSON) 28 August 1962 (28-08-62) col. 5, lines 27-42	1, 19-37, 44
A	US,A, 5,073,193 (CHAKLADER ET AL) 17 December 1991 (17-21-91) col. 7, line 35	1, 19-37, 42
A	US,A, 4,145,403 (FEY ET AL) 20 March 1979 (20-03-79) col. 4, lines 28-46	1, 19-37, 43
Y	US,A, 4,561,883 (MULLNER ET AL) 31 December 1985 (31-12-85) (col. 4, lines 51-62)	50-53
---		-----
A		38-41, 54-64

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

03 JULY 1996

Date of mailing of the international search report

22 AUG 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MELVYN ANDREWS

Telephone No. (703) 308-3739

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/03581

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 2 to 18
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Claim 2 contains a typographical error which recites "?" on line 1 rather than the number from which the claim depends.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/03581

A. CLASSIFICATION OF SUBJECT MATTER: US CL :

75/10.19, 10.21, 10.28; 420/590; 423/289, 613; 585/538; 219/121.36; 266/182; 373/18; 422/207

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☒ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.